
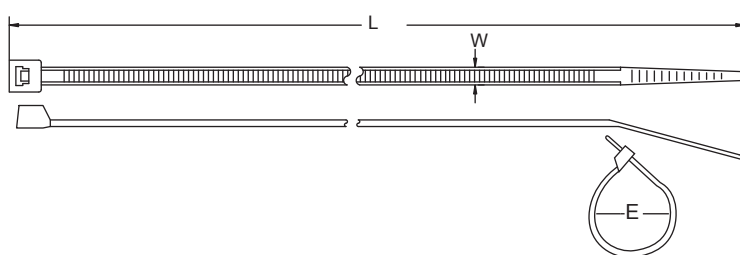


RCCN 日成GHS型耐热型尼龙扎线带 Heat Stabilized Cable Tie

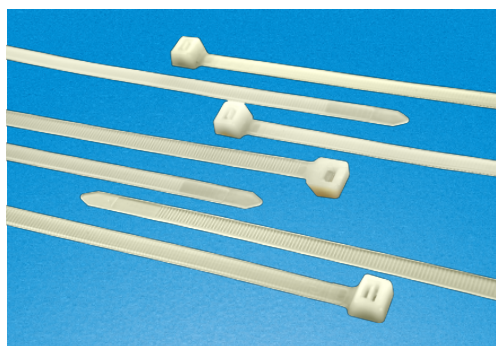

材质:采用UL合格认证之进口耐高温尼龙66(NYLON66)制成,防火等级94V-2,

特点:无锋利部位;备有让指头握紧的末端;扎带末端设计成易入式;

颜色:米黄色

特性:品质优良,静态耐热至125°C正常使用锁紧后不断裂松开。

使用方法:将扎带末端穿过带孔一拉,即可牢牢扣住。

说明:包装1000PCS: G100MB/K-HS

Material:Nylon 66,fireproof 94V-2,good insulationMaterial:Nylon 66, fireproof 94V-2,good insulation

Features:convenient design,no sharp position to hurt hands

Colors:light yellow

Certificates:UL:E306674,CE,RoHS,REACH.

Features:convenient design,no sharp position to hurt hands

Colors:light yellow

Certificates:UL:E306674,CE,RoHS,REACH.

单位/Unit:mm

型号 Item No. 100pcs	长度 Length L		宽度 Width W		捆扎范围 Bundle diameter E		承受拉力 Tensile Strength	
	mm	inch	mm	inch	mm	inch	kgs	lbs
G80M-HS	80	3.15	2.4	0.09	15	0.59	8.0	18
G100M-HS	100	3.94	2.5	0.10	22	0.87	8.1	18
G120M-HS	120	4.72	2.5	0.10	30	1.18	8.1	18
G160M-HS	160	6.3	2.5	0.10	38	1.50	8.1	18
G200M-HS	200	7.87	2.5	0.10	53	2.09	8.1	18
G150I-HS	150	5.91	3.6	0.14	35	1.38	18.2	40
G200I-HS	200	7.87	3.6	0.14	52	2.05	18.2	40
G250I-HS	250	9.84	3.6	0.14	65	2.56	18.2	40
G300I-HS	300	11.81	3.6	0.14	76	2.99	18.2	40
G370I-HS	370	14.57	3.6	0.14	102	4.02	18.2	40
G200ST-HS	200	7.87	4.8	0.19	50	1.97	22.2	50
G250ST-HS	250	9.84	4.8	0.19	60	2.36	22.2	50
G300ST-HS	300	11.81	4.8	0.19	76	2.99	22.2	50
G370ST-HS	370	14.57	4.8	0.19	102	4.02	22.2	50
G430ST-HS	430	16.93	4.8	0.19	110	4.33	22.2	50
G150HD-HS	150	5.91	7.6	0.30	33	1.30	54.4	120
G200HD-HS	200	7.87	7.6	0.30	50	1.97	54.4	120
G250HD-HS	250	9.84	7.6	0.30	65	2.56	54.4	120
G300HD-HS	300	11.81	7.6	0.30	76	2.99	54.4	120
G370HD-HS	370	14.49	7.6	0.30	102	4.02	54.4	120
G430HDS-HS	430	16.93	7.6	0.30	125	4.92	54.5	120
G430HD-HS	430	16.93	9.0	0.35	110	4.33	79.4	175
G530HD-HS	530	20.71	9.0	0.35	140	5.51	79.4	175

铁氟龙扎带/Teflon cable tie:G-TFL型

型号 Item No. 100pcs	长度 Length L		宽度 Width W		捆扎范围 Bundle diameter E		承受拉力 Tensile Strength	
	mm	inch	mm	inch	mm	inch	kgs	lbs
G100MB-TFL	100	3.94	2.5	0.10	22	0.87	8.1	18
G150IB-TFL	150	5.91	3.6	0.14	35	1.38	18.2	40
G200IB-TFL	200	7.87	3.6	0.14	52	2.05	18.2	40
G200STB-TFL	200	7.87	4.8	0.19	50	1.97	22.2	50
G300STB-TFL	300	11.81	4.8	0.19	76	2.99	22.2	50
G370STB-TFL	370	14.57	4.8	0.19	102	4.02	22.2	50
G200HDB-TFL	200	7.87	7.6	0.30	50	1.97	54.4	120
G300HDB-TFL	300	11.81	7.6	0.30	76	2.99	54.4	120
G370HDB-TFL	370	14.49	7.6	0.30	102	4.02	54.4	120

材质:铁氟龙,具有良好的耐酸、腐蚀、绝缘性,不易老化。

颜色:默认为黑色,可定制本色(蓝色)或其它颜色。

特性:品质优良,静态-20°C到+150°C

说明:灯饰、电机、机械设备油路管道的固定,汽车或船舶上高温环境电缆线路的固定。

Material:teflon UL approved ETFE, fireproof 94V-0, good acid resistant,good insulation

Colors:black, natural and other colors can be produced with MOQ

Features:good quality,statics -20°C to +150°C