


## RCCN 日成NBF型内螺纹金属软管接头 Conduit Fittings

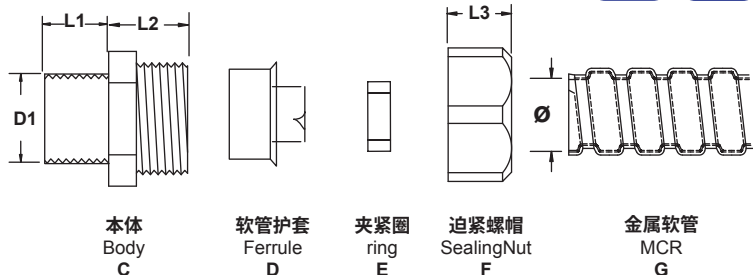

螺牙规格:管螺纹G

产品材质:C.F部位均采用优质加厚型锌合金制成.E采用丁腈橡胶(NBR)制成.  
D为铁皮压铸制成.

产品认证:欧洲CE,欧洲环保RoHS

产品特性: 1.内螺纹型用于接带螺纹钢管或配有外螺纹的连接件均可.  
2.除以下标准规格外,可另按需求任意变动大小及螺纹标准.

Thread:G

Material:A.C.F are made from zinc metal.B.E are made of rubber NBR).D is made of sheet iron .

Certificates:CE RoHS

Operate T.: -40°C to 100°C, 120°C in a short time.

Special thread can be produced

单位/Unit:mm

| 型号 Item No. |          | 螺牙标准<br><br>Thread | 配套日成金属软管 RCCN MCR<br>suitable RCCN metal flexible conduit MCR |                |               | 螺纹外径<br>Thread<br>O.D.<br>D1 | 螺纹长度<br>Thread<br>Length<br>L1 | 接合长度<br>Joint<br>Length<br>L2+L3 | 包装<br>Packing<br>pcs |
|-------------|----------|--------------------|---------------------------------------------------------------|----------------|---------------|------------------------------|--------------------------------|----------------------------------|----------------------|
| 锌合金         | 黄铜镀锌     |                    | 对应型号<br>Corresponding<br>item no                              | 公制<br>Metric ø | 英制<br>British |                              |                                |                                  |                      |
| 管螺纹 NBG-G   |          |                    |                                                               |                |               |                              |                                |                                  |                      |
| NBF-04G     | TNBF-04G | G3/8"              | MCR-04                                                        | 13             | 3/8"          | 16.66                        | 8                              | 18                               | 100                  |
| NBF-05G     | TNBF-05G | G1/2"              | MCR-05                                                        | 16             | 1/2"          | 20.95                        | 11                             | 23                               | 100                  |
| NBF-06G     | TNBF-06G | G3/4"              | MCR-06                                                        | 20             | 3/4"          | 26.44                        | 14                             | 22                               | 50                   |
| NBF-08G     | TNBF-08G | G1"                | MCR-08                                                        | 25             | 1"            | 33.25                        | 15                             | 28                               | 50                   |
| NBF-10G     | TNBF-10G | G1 1/4"            | MCR-10                                                        | 32             | 1 1/4"        | 41.91                        | 15                             | 30                               | 25                   |
| NBF-12G     | TNBF-12G | G1 1/2"            | MCR-12                                                        | 38             | 1 1/2         | 47.8                         | 16                             | 32                               | 25                   |
| NBF-16G     | TNBF-16G | G2"                | MCR-16                                                        | 51             | 2"            | 59.6                         | 18                             | 34                               | 10                   |
| NBF-20G     |          | G2 1/2"            | MCR-20                                                        | 64             | 2 1/2"        | 75.18                        | 22                             | 38                               | 10                   |
| NBF-24G     |          | G3"                | MCR-24                                                        | 80             | 3"            | 87.88                        | 22                             | 46                               | 5                    |
| NBF-32G     |          | G4"                | MCR-32                                                        | 100            | 4"            | 113                          | 24                             | 50                               | 5                    |
| 公制螺纹 NBF-M  |          |                    |                                                               |                |               |                              |                                |                                  |                      |
| NBF-04M     | TNBF-04M | M16*1.5            | MCR-04                                                        | 13             | 3/8"          | 16                           | 8                              | 18                               | 100                  |
| NBF-05M     | TNBF-05M | M20*1.5            | MCR-05                                                        | 16             | 1/2"          | 20                           | 11                             | 23                               | 100                  |
| NBF-06M     | TNBF-06M | M25*1.5            | MCR-06                                                        | 20             | 3/4"          | 25                           | 14                             | 22                               | 50                   |
| NBF-08M     | TNBF-08M | M32*1.5            | MCR-08                                                        | 25             | 1"            | 32                           | 15                             | 28                               | 50                   |
| NBF-10M     | TNBF-10M | M40*1.5            | MCR-10                                                        | 32             | 1 1/4"        | 40                           | 15                             | 30                               | 25                   |
| NBF-12M     | TNBF-12M | M50*1.5            | MCR-12                                                        | 38             | 1 1/2         | 50                           | 16                             | 32                               | 25                   |
| NBF-16M     | TNBF-16M | M63*1.5            | MCR-16                                                        | 51             | 2"            | 63                           | 18                             | 34                               | 10                   |

## RCCN 日成ELZ型外牙镀锌管接头 Conduit Fittings



螺牙规格:公制(Metric).德制PG.美制NPT

产品材质:采用优质加厚型锌合金制成

工作温度:-40°C至100°C,瞬间达120°C

颜色种类:金属色/白色

产品特性:一头固定于板,一头接镀锌钢管

备注:含螺母,垫片

本品有起订量要求,交期2-4周。



| 型号<br>Item No.  | 外螺纹<br>D1 | 内螺纹<br>D2 |
|-----------------|-----------|-----------|
| <b>ELZ-M</b>    |           |           |
| ELZ-M12/M16     | M12*1.5   | M16*1.5   |
| ELZ-M16/M20     | M16*1.5   | M20*1.5   |
| ELZ-M20/M25     | M20*1.5   | M25*1.5   |
| ELZ-M25/M32     | M25*1.5   | M32*1.5   |
| ELZ-M32/M40     | M32*1.5   | M40*1.5   |
| ELZ-M40/M50     | M40*1.5   | M50*1.5   |
| ELZ-M50/M63     | M50*1.5   | M63*1.5   |
| <b>ELZ-P</b>    |           |           |
| ELZ-PG7/PG9     | PG7       | PG9       |
| ELZ-PG9/PG11    | PG9       | PG11      |
| ELZ-PG11/PG13.5 | PG11      | PG13.5    |
| ELZ-PG13.5/PG16 | PG13.5    | PG16      |
| ELZ-PG16/PG21   | PG16      | PG21      |

| 型号<br>Item No. | 外螺纹<br>D1 | 内螺纹<br>D2 |
|----------------|-----------|-----------|
| <b>ELZ-P</b>   |           |           |
| ELZ-PG21/PG29  | PG21      | PG29      |
| ELZ-PG29/PG36  | PG29      | PG36      |
| ELZ-PG36/PG42  | PG36      | PG42      |
| ELZ-PG42/PG48  | PG42      | PG48      |
| <b>ELZ-G</b>   |           |           |
| ELZ-G3/8-G1/2  | G3/8"     | G1/2"     |
| ELZ-G1/2-G3/4  | G1/2"     | G3/4"     |
| ELZ-G3/4-G1    | G3/4"     | G 1"      |
| ELZ-G1-G1-1/4  | G 1"      | G 1 1/4"  |
| <b>ELZ-M/G</b> |           |           |
| ELZ-M20-G1/2   | M20*1.5   | G1/2"     |
| ELZ-M25-G3/4   | M25*1.5   | G3/4"     |
| ELZ-M32-G1     | M32*1.5   | G 1"      |
| ELZ-M40-G1-1/4 | M32*1.5   | G 1 1/4"  |