


RCCN 日成BLS型耐高温不锈钢电缆防水接头 BLS-Type Stainless steel Cable Gland

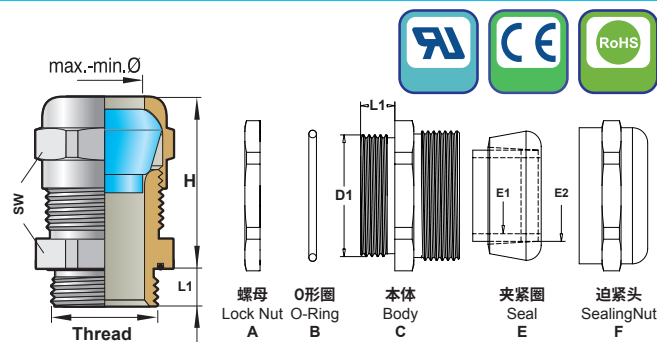

产品材质:金属:不锈钢,橡胶:硅橡胶 螺牙规格:M/PG/NPT/G 产品认证:CE ROHS 工作温度:-50°C至250°C 防护等级:IP68

使用方法:将本体固定机板,旋紧迫紧头即可固定电缆

Thread:Metric/PG/NPT/G(PF)

Material:Brass,nickel plated Seal/Oring:silicon rubber Certificates:CE,EX,ROHS

Tempe.range:-50°C to +250°C Protection:IP68.

单位/Unit:mm										
型号 Item No.				适用电缆 Cable Range Ø	内层橡胶 with inlet E1	外层橡胶 without inlet E2	螺纹长度 ThreadLength L1	接合长度 Joint Length H	板手 Spanner SW A/F	包装 Std.Pkg. pcs
公制螺纹 M	德制螺纹 PG	美制螺纹 NPT	英制螺纹 G							
BLS-M12×1.5-8	BLS-PG7-8	BLS-NPT1/4-8	BLS-G1/4-8	2-8	2-5	5-8	7	21	19	100PCS
BLS-M16×1.5-11	BLS-PG9-11			4-11	4-7	7-11	8	25	21	
BLS-M18×1.5-11	BLS-PG11-11	BLS-NPT3/8-11	BLS-G3/8-11	4-11	4-7	7-11	8	25	23	
BLS-M20×1.5-14	BLS-PG13.5-14	BLS-NPT1/2-14	BLS-G1/2-14	5-14	5-9	9-14	9	29	25	
BLS-M22×1.5-14	BLS-PG16-14			5-14	5-9	9-14	10	29	28	
BLS-M24×1.5-20				11-20	11-16	16-20	11	30	30	25PCS
BLS-M25×1.5-20	BLS-PG21-20	BLS-NPT3/4-20	BLS-G3/4-20	11-20	11-16	16-20	11	30	30	
BLS-M27×1.5-20				11-20	11-16	16-20	11	30	30	
BLS-M30×2.0-25				15-25	15-20	20-25	11	32	36	
BLS-M32×1.5-25		BLS-NPT1-25	BLS-G1-25	15-25	15-20	20-25	11	32	36	
BLS-M33×2.0-25				15-25	15-20	20-25	11	32	36	1PCS
BLS-M36×2.0-25				15-25	15-20	20-25	11	32	40	
BLS-M40×1.5-32	BLS-PG29-32	BLS-NPT1-1/4-32	BLS-G1-1/4-32	20-32	20-26	26-32	12	35	45	
	BLS-PG36-42			31-42	31-35	35-42	13	39	55	
BLS-M50×1.5-42	BLS-PG42-42	BLS-NPT1-1/2-42	BLS-G1-1/2-42	31-42	31-35	35-42	14	39	60	
BLS-M63×1.5-54	BLS-PG48-54	BLS-NPT2-54	BLS-G2-54	41-54	41-54	46-54	14	40	70	1PCS
BLS-M72×2.0-54				50-54	50-54	60-65	20	47	90	
BLS-M75×1.5-54		BLS-NPT2-1/2-54	BLS-G2-1/2-54	50-54	50-54	60-65	20	47	90	
BLS-M72×1.5-65		BLS-NPT2-1/2-65	BLS-G2-1/2-65	54-65	54-58	58-65	20	47	90	
BLS-M75×1.5-65		BLS-NPT2-1/2-65	BLS-G2-1/2-65	54-65	54-58	58-65	20	47	90	
BLS-M85×2.0-77		BLS-NPT3-77	BLS-G3-77	65-77	65-70	70-77	20	49	100	1PCS
BLS-M90×2.0-77				65-77	65-70	70-77	20	49	100	

