



RCCN 日成VDR型环保阻燃线槽 Wide Slot Wiring Duct

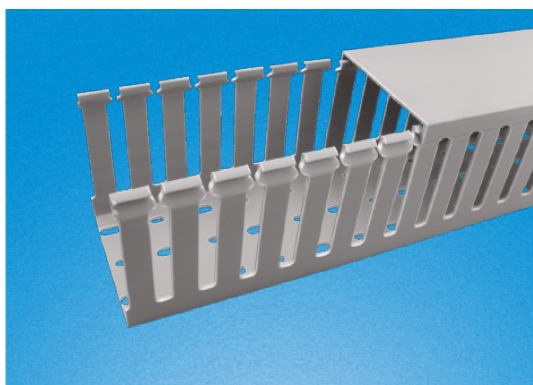


产品材质:采用低卤素硬质PVC料制成,环保无污染,不含铅等有毒物。
 产品认证:美国UL:E306674 欧洲CE 欧洲环保RoHS,REACH,铁道阻燃低烟。
 防火等级:UL94V-0,低烟微卤,遇火不燃烧,防火性及绝缘性特佳。
 产品构造:由槽底及槽盖组成,底槽两侧设有出线孔。
 颜色:灰色,白色,蓝色,黑色(可定制其它颜色,有起订量要求)
 工作温度:静态-40℃持续高温至65℃,短时间可达85℃。
 使用方法:先将底槽固定,将所要配的线装入槽内,盖上槽盖即可。
 产品特性:1.反扣式槽盖与槽体设计组合后绝不脱落,且接合面平滑,不割伤手及擦损附近配线。
 2.配线槽65℃内不易断裂,变形,变色,装配省时便利。
 3.出线孔低、组合容易、拆卸简单、易于配线。

Wide slot/finger design provides greater sidewall rigidity and can be used with a wide range of wire bundle sizes.
 Certificates:UL:E306674 CE:EN50085 RoHS,REACH. Made of rigid PVC
 Work temperature:-40 °c to 65 °c
 UL94 Flammability Rating of V-0
 Provided with mounting holes


Available color:gray,white,blue,black and other special colors
 推荐:灰色为常规库存产品,其它颜色有起订量要求。
 Comment:gray is the common color, other color need more MOQ

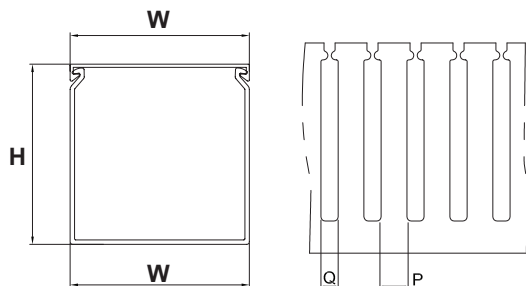



样式: 75mm-140mm宽
 Style: Width from 75mm to 140mm



样式: 150-200mm宽
 Style: Width from 150mm to 200mm



样式: 16mm-75mm宽
 Style: Deep from 16mm to 75mm




可定制大小孔
 EU Hole of DIN

单位/Unit:mm

型号 Item No.				宽×高 High X width W×H	孔宽 Slot width Q	齿宽 Finger width P	电线容量 以2.0平方计算 Wire capability/2.0sq	标准长度 Standard Length
灰色Gray RAL7030	白色White RAL9016	蓝色Blue RAL5015	黑色Black RAL9005					
VDR2580	VDR2580W	VDR2580E	VDR2580B	25×80	8	12	100~120pcs	每支 2米 含槽底槽盖
VDR3080	VDR3080W	VDR3080E	VDR3080B	30×80	8	12	110~125pcs	
VDR3580	VDR3580W	VDR3580E	VDR3580B	35×80	8	12	110~130pcs	
VDR4080	VDR4080W	VDR4080E	VDR4080B	40×80	8	12	140~160pcs	
VDR4580	VDR4580W	VDR4580E	VDR4580B	45×80	8	12	140~160pcs	
VDR5080	VDR5080W	VDR5080E	VDR5080B	50×80	8	12	160~180pcs	
VDR5580	VDR5580W	VDR5580E	VDR5580B	55×80	8	12	160~180pcs	
VDR6080	VDR6080W	VDR6080E	VDR6080B	60×80	8	12	180~210pcs	
VDR8080	VDR8080W	VDR8080E	VDR8080B	80×80	8	12	240~290pcs	
VDR10080	VDR10080W	VDR10080E	VDR10080B	100×80	8	12	260~350pcs	
VDR12080	VDR12080W	VDR12080E	VDR12080B	120×80	8	12	280~380pcs	Pcs/Branch 2M Including tuning and lids
VDR14080	VDR14080W	VDR14080E	VDR14080B	140×80	8	12	350~450pcs	
VDR25100	VDR25100W	VDR25100E	VDR25100B	25×100	8	12	110~160pcs	
VDR33100	VDR33100W	VDR33100E	VDR33100B	33×100	8	12	130~165pcs	
VDR40100	VDR40100W	VDR40100E	VDR40100B	40×100	8	12	130~175pcs	
VDR50100	VDR50100W	VDR50100E	VDR50100B	50×100	8	12	220~250pcs	
VDR60100	VDR60100W	VDR60100E	VDR60100B	60×100	8	12	240~290pcs	
VDR70100	VDR70100W	VDR70100E	VDR70100B	70×100	8	12	250~340pcs	
VDR75100	VDR75100W	VDR75100E	VDR75100B	75×100	8	12	260~350pcs	
VDR80100	VDR80100W	VDR80100E	VDR80100B	80×100	8	12	260~350pcs	
VDR100100	VDR100100W	VDR100100E	VDR100100B	100×100	8	12	300~400pcs	
VDR120100	VDR120100W	VDR120100E	VDR120100B	120×100	8	12	350~450pcs	
VDR150100	VDR150100W	VDR150100E	VDR150100B	150×100	8	12	400~650pcs	
VDR200100	VDR200100W	VDR200100E	VDR200100B	200×100	8	12	600~800pcs	

说明: 80高-100高边孔无突出,80高以内 10-75高已由VDRF系列代替 Tips:80 height to 100 without butterfly,height smaller than 80 can be insteaded of VDRF

RCCN 日成VDR型环保阻燃线槽 Wide Slot Wiring Duct

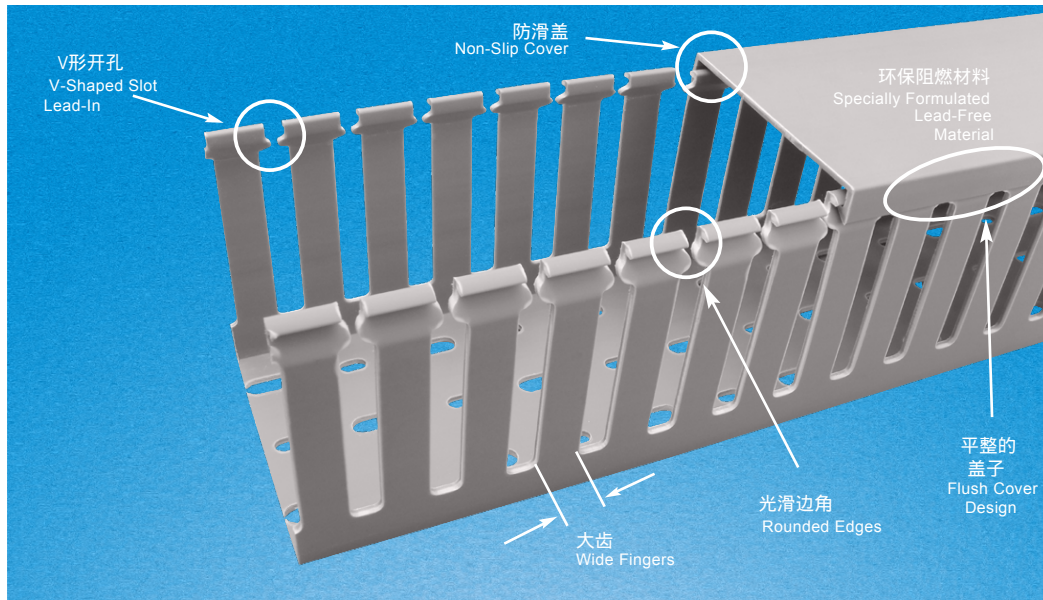

特点/Features	优点/Advantages	益处/Benefits
大的齿和大的孔 Wide finger and slot design Can be used with a wide range of wire and	齿宽有12mm,孔宽8mm,齿硬度大 Finger 12mm Slot 8 mm,Rigid fingers	适用于较大的电线 bundle sizes
环保阻燃材料 Rohs approved Enviroment-friendly Material	符合欧盟ROHS环保测试, 符合美国UL94V-0,良好的阻燃性 Approved by EU Rohs, Compliant with US UL 94V-0,good inflaming	环保不含有铅的PVC 不会对人体健康构成危害,材料良好阻燃性, 使明火自熄,在着火的情况下,保证安全 Eliminates health concerns associated with PVC that contains lead
光滑的边角 Smooth rounded edges	齿的顶端和孔的边缘光滑 Smooth edges in duct slots and at top of duct fingers	防止电线和手被毛刺割伤 Protects hands and wiring/cabling from abrasion
防滑盖 non-slip liner inside duct covers)	安装时不容易滑盖 Will not slide easily when installed on duct base	防运输振动导致滑盖 防线槽垂直安装时滑盖 Cover stays in place during shipment, vibration and when in a vertical orientation,eliminating rework
平整的盖子设计 Flush cover design Greater capacity than traditional duct designs	比传统的设计有更大的空间 盖子与槽体齐平 Cover sits flush with sidewall	比老款装相同数量的电线表面更平整美观 Can potentially use a smaller size wiring duct for same number of wires Provides a neat and finished appearance
冲孔断面/Slot smooth	冲孔后齿的表面平整光滑 Smooth adge after punching	不用修毛刺,节省时间 No need to get offer abrasion, save time
V型开孔设计 V-shaped slot lead-in V-shape funnels wires into slot for	V型槽孔使电线更易装入 Easier insertion	加快电线安装 Speeds wire installation
四种颜色可选 Four different colors	可用于不同场合的安装要求。 Suitable to different environments using	项目对颜色有要求时选择范围更加的广泛更快的满足终端用户的需求。 Can meet different customers'request in different project
通过多项认证 Approved by many certificates	美国UL,加拿大CULUS, 欧盟CE ,ROHS,REACH 铁道部机车阻燃低烟认证。 America UL,Canada CULUS, EuropeCE ,ROHS,REACH Flamily and low smoking certificate	满足项目应用零配件需要提供产品认证,确保产品在世界各地均可放心使用 Can provide related certificates of the projects or parts need

