


RCCN 日成HVDR型环保阻燃线槽 Narrow Slot Wiring Duct

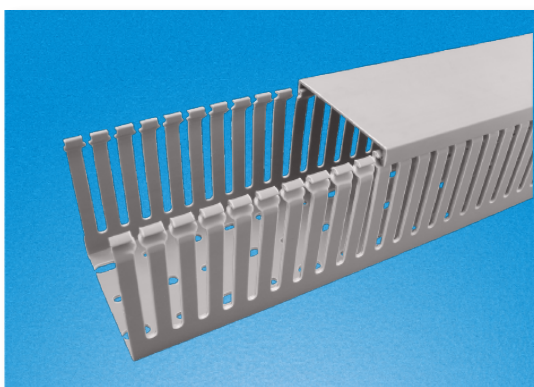



产品材质:采用低卤素硬质PVC料制成,环保无污染,不含铅等有毒物。
 产品认证:美国UL:E306674 欧洲CE 欧洲环保RoHS,REACH,铁道阻燃低烟。
 防火等级:UL94V-0,低烟微卤,遇火不燃烧,防火性及绝缘性特佳。
 产品构造:由槽底及槽盖组成,底槽两侧设有出线孔。
 颜色:灰色.白色.蓝色.黑色(可定制其它颜色,有起订量要求)
 工作温度:静态-40°C持续高温至65°C,短时间可达85°C。
 使用方法:先将底槽固定,将所要配的线装入槽内,盖上槽盖即可。
 产品特性:1.反扣式槽盖与槽体设计组合绝不变脱落,且接合面平滑,不割伤手及擦损附近配线。
 2.配线槽65°C内不易断裂,变形,变色,装配省时便利。
 3.出线孔低、组合容易、拆卸简单、易于配线。

更多选择:量大可按需求生产所需规格或定制长度.例:HVDR8080(L=1.7M)


Wide slot/finger design provides greater sidewall rigidity and can be used with a wide range of wire bundle sizes.
 Certificates:UL:E306674 CE:EN50085 RoHS,REACH. Made of rigid PVC
 Work temperature:-40 °c to 65 °c
 UL94 Flammability Rating of V-0
 Provided with mounting holes
 Available color:gray.white.blue.black and other special colors
 Special length come with MOQ request




推荐:本产品为老型号,新型号HVDRT代替C15-16



样式: 16mm-72mm宽
 Style: Width from 16mm to 72mm



样式: 75mm-140mm宽
 Style: Width from 75mm to 140mm



本系列为老型号,由HVDR代替,孔无分隔齿设计。本系列75高为非标产品。
 This series is old part no., with HVDR,without butterfly in the fingers
 75 Height is not standard products

大小孔型号/Eu hole size:VDR4060F/614


单位/Unit:mm

型号 Item No.				宽×高 High X width W×H	孔宽 Slot width Q	齿宽 Finger width P	电线容量 以2.0平方计算 Wire capability/2.0sq	标准长度 Standard Length
灰色Gray RAL7030	白色White RAL9016	蓝色Blue RAL5015	黑色Black RAL9005					
HVDR1616	HVDR1616W	HVDR1616E	HVDR1616B	16×16	5	8	3~10pcs	每支 2米 含槽底槽盖
HVDR2516	HVDR2516W	HVDR2516E	HVDR2516B	25×16	5	8	8~12pcs	
HVDR1520	HVDR1520W	HVDR1520E	HVDR1520B	15×20	5	8	8~12pcs	
HVDR2020	HVDR2020W	HVDR2020E	HVDR2020B	20×20	5	8	10~20pcs	
HVDR4020	HVDR4020W	HVDR4020E	HVDR4020B	40×20	5	8	15~30pcs	
HVDR1525	HVDR1525W	HVDR1525E	HVDR1525B	15×25	5	8	5~15pcs	
HVDR2025	HVDR2025W	HVDR2025E	HVDR2025B	20×25	5	8	5~15pcs	
HVDR2525	HVDR2525W	HVDR2525E	HVDR2525B	25×25	5	8	10~25pcs	
HVDR3025	HVDR3025W	HVDR3025E	HVDR3025B	30×25	5	8	12~28pcs	
HVDR4025	HVDR4025W	HVDR4025E	HVDR4025B	40×25	5	8	20~35pcs	
HVDR5025	HVDR5025W	HVDR5025E	HVDR5025B	50×25	5	8	12~28pcs	Pcs/Branch 2M Including tuning and lids
HVDR1530	HVDR1530W	HVDR1530E	HVDR1530B	15×30	5	8	8~15pcs	
HVDR2030	HVDR2030W	HVDR2030E	HVDR2030B	20×30	5	8	25~35pcs	
HVDR2530	HVDR2530W	HVDR2530E	HVDR2530B	25×30	5	8	25~35pcs	
HVDR3030	HVDR3030W	HVDR3030E	HVDR3030B	30×30	5	8	25~35pcs	
HVDR4030	HVDR4030W	HVDR4030E	HVDR4030B	40×30	5	8	30~40pcs	
HVDR5030	HVDR5030W	HVDR5030E	HVDR5030B	50×30	5	8	40~50pcs	
HVDR6030	HVDR6030W	HVDR6030E	HVDR6030B	60×30	5	8	50~60pcs	
HVDR3333	HVDR3333W	HVDR3333E	HVDR3333B	33×33	5	8	35~45pcs	
HVDR2035	HVDR2035W	HVDR2035E	HVDR2035B	20×35	5	8	30~40pcs	
HVDR3535	HVDR3535W	HVDR3535E	HVDR3535B	35×35	5	8	35~45pcs	Including tuning and lids
HVDR5035	HVDR5035W	HVDR5035E	HVDR5035B	50×35	5	8	40~60pcs	
HVDR2040	HVDR2040W	HVDR2040E	HVDR2040B	20×40	5	8	16~22pcs	
HVDR2540	HVDR2540W	HVDR2540E	HVDR2540B	25×40	5	8	20~35pcs	
HVDR3540	HVDR3540W	HVDR3540E	HVDR3540B	35×40	5	8	30~45pcs	
HVDR4040	HVDR4040W	HVDR4040E	HVDR4040B	40×40	5	8	60~70pcs	
HVDR6040	HVDR6040W	HVDR6040E	HVDR6040B	60×40	5	8	100~115pcs	
HVDR8040	HVDR8040W	HVDR8040E	HVDR8040B	80×40	5	8	120~135pcs	
HVDR10040	HVDR10040W	HVDR10040E	HVDR10040B	100×40	5	8	120~135pcs	
HVDR12040	HVDR12040W	HVDR12040E	HVDR12040B	120×40	5	8	140~155pcs	

RCCN 日成HVDR型环保阻燃线槽 Narrow Slot Wiring Duct

型号 Item No.				宽 × 高 High X width W×H	孔宽 Slot width Q	齿宽 Finger width P	电线容量 以2.0平方计算 Wire capability/2.0sq	标准长度 Standard Length
灰色Gray RAL7030	白色White RAL9016	蓝色Blue RAL5015	黑色Black RAL9005					
HVDR2545	HVDR2545W	HVDR2545E	HVDR2545B	25×45	5	8	20~25pcs	每支 2米 含槽底槽盖
HVDR3345	HVDR3345W	HVDR3345E	HVDR3345B	33×45	5	8	40~55pcs	
HVDR4545	HVDR4545W	HVDR4545E	HVDR4545B	45×45	5	8	60~70pcs	
HVDR6545	HVDR6545W	HVDR6545E	HVDR6545B	65×45	5	8	110~120pcs	
HVDR2050	HVDR2050W	HVDR2050E	HVDR2050B	20×50	5	8	18~28pcs	
HVDR2550	HVDR2550W	HVDR2550E	HVDR2550B	25×50	5	8	20~30pcs	
HVDR3050	HVDR3050W	HVDR3050E	HVDR3050B	30×50	5	8	25~40pcs	
HVDR3550	HVDR3550W	HVDR3550E	HVDR3550B	35×50	5	8	40~60pcs	
HVDR4050	HVDR4050W	HVDR4050E	HVDR4050B	40×50	5	8	60~70pcs	
HVDR4550	HVDR4550W	HVDR4550E	HVDR4550B	45×50	5	8	70~80pcs	
HVDR5050	HVDR5050W	HVDR5050E	HVDR5050B	50×50	5	8	80~90pcs	每支 2米 含槽底槽盖
HVDR5550	HVDR5550W	HVDR5550E	HVDR5550B	55×50	5	8	85~95pcs	
HVDR6050	HVDR6050W	HVDR6050E	HVDR6050B	60×50	5	8	100~120pcs	
HVDR7550	HVDR7550W	HVDR7550E	HVDR7550B	75×50	5	8	150~170pcs	
HVDR8050	HVDR8050W	HVDR8050E	HVDR8050B	80×50	5	8	160~180pcs	
HVDR10050	HVDR10050W	HVDR10050E	HVDR10050B	100×50	5	8	200~250pcs	
HVDR12555	HVDR12555W	HVDR12555E	HVDR12555B	125×55	5	8	220~270pcs	
HVDR2060	HVDR2060W	HVDR2060E	HVDR2060B	20×60	5	8	35~45pcs	
HVDR2560	HVDR2560W	HVDR2560E	HVDR2560B	25×60	5	8	40~50pcs	
HVDR3060	HVDR3060W	HVDR3060E	HVDR3060B	30×60	5	8	60~80pcs	
HVDR3560	HVDR3560W	HVDR3560E	HVDR3560B	35×60	5	8	90~105pcs	每支 2米 含槽底槽盖
HVDR4060	HVDR4060W	HVDR4060E	HVDR4060B	40×60	5	8	100~115pcs	
HVDR4560	HVDR4560W	HVDR4560E	HVDR4560B	45×60	5	8	110~125pcs	
HVDR5060	HVDR5060W	HVDR5060E	HVDR5060B	50×60	5	8	120~135pcs	
HVDR6060	HVDR6060W	HVDR6060E	HVDR6060B	60×60	5	8	120~135pcs	
HVDR8060	HVDR8060W	HVDR8060E	HVDR8060B	80×60	5	8	180~210pcs	
HVDR10060	HVDR10060W	HVDR10060E	HVDR10060B	100×60	5	8	240~290pcs	
HVDR11060	HVDR11060W	HVDR11060E	HVDR11060B	110×60	5	8	250~300pcs	
HVDR12060	HVDR12060W	HVDR12060E	HVDR12060B	120×60	5	8	260~320pcs	
HVDR15060	HVDR15060W	HVDR15060E	HVDR15060B	150×60	5	8	300~360pcs	
HVDR2565	HVDR2565W	HVDR2565E	HVDR2565B	25×65	5	8	40~50pcs	每支 2米 含槽底槽盖
HVDR3365	HVDR3365W	HVDR3365E	HVDR3365B	33×65	5	8	40~70pcs	
HVDR4565	HVDR4565W	HVDR4565E	HVDR4565B	45×65	5	8	110~120pcs	
HVDR6565	HVDR6565W	HVDR6565E	HVDR6565B	65×65	5	8	180~200pcs	
HVDR7265	HVDR7265W	HVDR7265E	HVDR7265B	72×65	5	8	180~230pcs	
HVDR5075	HVDR5075W	HVDR5075E	HVDR5075B	50×75	5	8	180~210pcs	
HVDR7575	HVDR7575W	HVDR7575E	HVDR7575B	75×75	5	8	200~240pcs	
HVDR10075	HVDR10075W	HVDR10075E	HVDR10075B	100×75	5	8	250~290pcs	
HVDR2580	HVDR2580W	HVDR2580E	HVDR2580B	25×80	5	8	100~120pcs	
HVDR3080	HVDR3080W	HVDR3080E	HVDR3080B	30×80	5	8	110~125pcs	
HVDR3580	HVDR3580W	HVDR3580E	HVDR3580B	35×80	5	8	110~130pcs	每支 2米 含槽底槽盖
HVDR4080	HVDR4080W	HVDR4080E	HVDR4080B	40×80	5	8	140~160pcs	
HVDR4580	HVDR4580W	HVDR4580E	HVDR4580B	45×80	5	8	140~160pcs	
HVDR5080	HVDR5080W	HVDR5080E	HVDR5080B	50×80	5	8	160~180pcs	
HVDR5580	HVDR5580W	HVDR5580E	HVDR5580B	55×80	5	8	160~180pcs	
HVDR6080	HVDR6080W	HVDR6080E	HVDR6080B	60×80	5	8	180~210pcs	
HVDR8080	HVDR8080W	HVDR8080E	HVDR8080B	80×80	5	8	240~290pcs	
HVDR10080	HVDR10080W	HVDR10080E	HVDR10080B	100×80	5	8	260~350pcs	
HVDR12080	HVDR12080W	HVDR12080E	HVDR12080B	120×80	5	8	280~380pcs	
HVDR14080	HVDR14080W	HVDR14080E	HVDR14080B	140×80	5	8	350~450pcs	
HVDR25100	HVDR25100W	HVDR25100E	HVDR25100B	25×100	5	8	110~160pcs	每支 2米 含槽底槽盖
HVDR33100	HVDR33100W	HVDR33100E	HVDR33100B	33×100	5	8	130~165pcs	
HVDR40100	HVDR40100W	HVDR40100E	HVDR40100B	40×100	5	8	130~175pcs	
HVDR50100	HVDR50100W	HVDR50100E	HVDR50100B	50×100	5	8	220~250pcs	
HVDR60100	HVDR60100W	HVDR60100E	HVDR60100B	60×100	5	8	240~290pcs	
HVDR70100	HVDR70100W	HVDR70100E	HVDR70100B	70×100	5	8	250~340pcs	
HVDR75100	HVDR75100W	HVDR75100E	HVDR75100B	75×100	5	8	260~350pcs	
HVDR80100	HVDR80100W	HVDR80100E	HVDR80100B	80×100	5	8	260~350pcs	
HVDR100100	HVDR100100W	HVDR100100E	HVDR100100B	100×100	5	8	300~400pcs	
HVDR120100	HVDR120100W	HVDR120100E	HVDR120100B	120×100	5	8	350~450pcs	
HVDR150100	HVDR150100W	HVDR150100E	HVDR150100B	150×100	5	8	400~650pcs	每支 2米 含槽底槽盖
HVDR100130	HVDR100130W	HVDR100130E	HVDR100130B	100×130	5	8	350~450pcs	
HVDR200100	HVDR200100W	HVDR200100E	HVDR200100B	200×100	5	8	600~800pcs	
HVDR200150	HVDR200150W	HVDR200150E	HVDR200150B	200×150	5	8	900~1200pcs	

RCCN 日成HVDR型环保阻燃线槽 Narrow Slot Wiring Duct

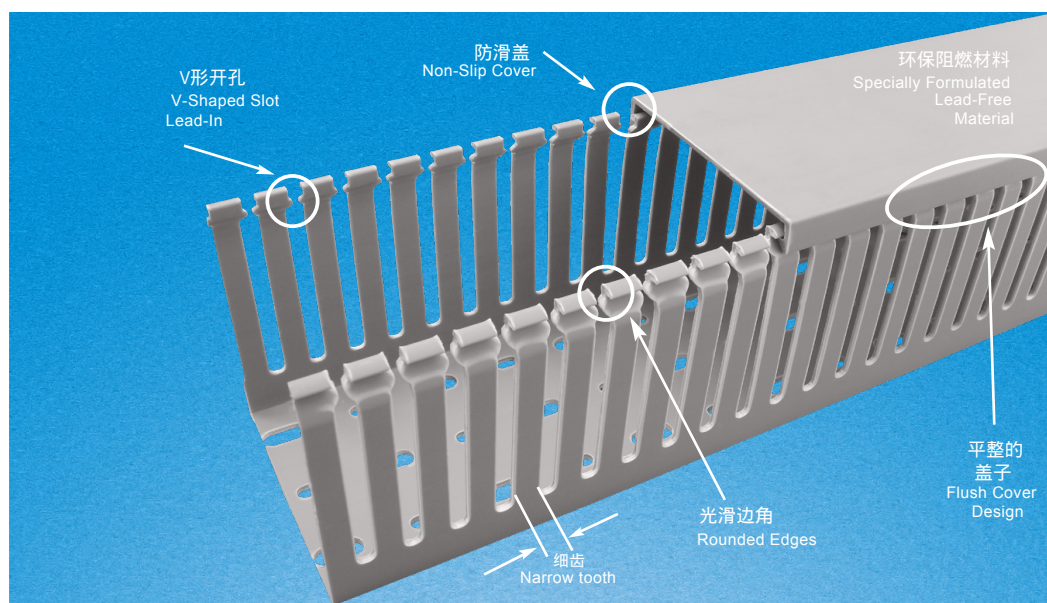

特点/Features	优点/Advantages	益处/Benefits
细的齿和细的孔 Narrow finger and slot design	较近的电器接线空间满足高密度布线 Allows further fanning of wires for neater wire	允许更多的布线,使布线效果整体美观 Mmanagement in high-density control panels
环保阻燃材料 Rohs approved Enviroment-friendly Material	符合欧盟ROHS环保测试, 符合美国UL94V-0,良好的阻燃性 Approved by EU Rohs, Compliant with US UL 94V-0,good inflaming	环保不含有铅的PVC 不会对人体健康构成危害,材料良好阻燃性, 使明火自熄,在着火的情况下,保证安全 Eliminates health concerns associated with PVC that contains lead
光滑的边角 Smooth rounded edges	齿的顶端和孔的边缘光滑 Smooth edges in duct slots and at top of duct fingers	防止电线和手被毛刺割伤 Protects hands and wiring/cabling from abrasion
防滑盖 (non-slip liner inside duct covers)	安装时不容易滑盖 Will not slide easily when installed on duct base	防运输振动导致滑盖 防线槽垂直安装时滑盖 Cover stays in place during shipment, vibration and when in a vertical orientation,eliminating rework
平整的盖子设计 Flush cover designGreater capacity than traditional duct designs	比传统的设计有更大的空间 盖子与槽体齐平 Cover sits flush with sidewall	比老款装相同数量的电线表面更平整美观 Can potentially use a smaller size wiring duct for same number of wires Provides a neat and finished appearance
冲孔断面/Slot smooth	冲孔后齿的表面平整光滑 Smooth adge after punching	不用修毛刺,节省时间 No need to get offer abrasion, save time
V型开孔设计 V-shaped slot lead-in V-shape funnels wires into slot for	V型槽孔使电线更易装入 Easier insertion	加快电线安装 Speeds wire installation
四种颜色可选 Four different colors	可用于不同场合的安装要求。 Suitable to different environments using	项目对颜色有要求时选择范围更加的广泛更快的满足终端用户的需求。 Can meet different customers'request in different project
通过多项认证 Approved by many certificates	美国UL,加拿大CULUS, 欧盟CE ,ROHS,REACH 铁道部机车阻燃低烟认证。 America UL,Canada CULUS, EuropeCE ,ROHS,REACH Flamility and low smoking certificate	满足项目应用零配件需要提供产品认证,确保产品在世界各地均可放心使用 Can provide related certificates of the projects or parts need



