


RCCN 日成DC型环保线槽盖 Duct Covers

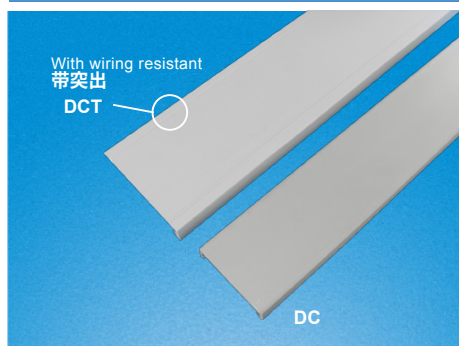

产品材质:采用低卤素硬质PVC料制成,环保无污染,不含铅等有毒物。

产品认证:欧洲环保RoHS,REACH。

防火等级:UL94V-0,低烟微卤,遇火不燃烧,防火性及绝缘性特佳。

颜色:灰色.白色.蓝色.黑色(可定制其它颜色,有起订量要求)。

说明:DCT槽盖顶部有突出标识,可与日成所有系列底组合配套。

推荐:灰色为常规库存产品,其它颜色有起订量要求。

Certificates:UL:E306674 CE:EN50085 RoHS,REACH。

Made of Low halogen, lead free and environment-friendly rigid PVC

UL Recognized continuous use temperature: 50°C (122°F)

UL94 Flammability Rating of V-0

Provided with mounting holes


Available color:gray.white.blue.black and other special colors

Work Temperature:-40°C to 65°C

单位/Unit:mm

RAL7030	RAL9022	RAL7047	RAL9016	RAL5015	RAL9005	宽 Wide W	适合线槽规格 Suitable wiring duct Specifications	标准长度 Standard Length
灰色 Gray	浅灰色Gray Light gray	灰白色 Gray white	白色 White	蓝色 Blue	黑色 Black			
DC-15G	DC-15G/9022	DC-15G/7047	DC-15W	DC-15E	DC-15B	15	15宽线槽	每支 2米 含槽底槽盖
DC-16G	DC-16G/9022	DC-16G/7047	DC-16W	DC-16E	DC-16B	16	16宽线槽	
DC-20G	DC-20G/9022	DC-20G/7047	DC-20W	DC-20E	DC-20B	20	20宽线槽	
DC-22G	DC-22G/9022	DC-22G/7047	DC-22W	DC-22E	DC-22B	22	22宽线槽	
DC-25G	DC-25G/9022	DC-25G/7047	DC-25W	DC-25E	DC-25B	25	25宽线槽	
DC-30G	DC-30G/9022	DC-30G/7047	DC-30W	DC-30E	DC-30B	30	30宽线槽	
DC-33G	DC-33G/9022	DC-33G/7047	DC-33W	DC-33E	DC-33B	33	33宽线槽	
DC-35G	DC-35G/9022	DC-35G/7047	DC-35W	DC-35E	DC-35B	35	35宽线槽	
DC-40G	DC-40G/9022	DC-40G/7047	DC-40W	DC-40E	DC-40B	40	40宽线槽	
DC-45G	DC-45G/9022	DC-45G/7047	DC-45W	DC-45E	DC-45B	45	45宽线槽	
DC-50G	DC-50G/9022	DC-50G/7047	DC-50W	DC-50E	DC-50B	50	50宽线槽	Pcs/Branch 2M Including tuning and lids
DC-55G	DC-55G/9022	DC-55G/7047	DC-55W	DC-55E	DC-55B	55	55宽线槽	
DC-60G	DC-60G/9022	DC-60G/7047	DC-60W	DC-60E	DC-60B	60	60宽线槽	
DC-65G	DC-65G/9022	DC-65G/7047	DC-65W	DC-65E	DC-65B	65	65宽线槽	
DC-70G	DC-70G/9022	DC-70G/7047	DC-70W	DC-70E	DC-70B	70	70宽线槽	
DC-72G	DC-72G/9022	DC-72G/7047	DC-72W	DC-72E	DC-72B	72	72宽线槽	
DC-75G	DC-75G/9022	DC-75G/7047	DC-75W	DC-75E	DC-75B	75	75宽线槽	
DC-80G	DC-80G/9022	DC-80G/7047	DC-80W	DC-80E	DC-80B	80	80宽线槽	
DC-100G	DC-100G/9022	DC-100G/7047	DC-100W	DC-100E	DC-100B	100	100宽线槽	
DC-110G	DC-110G/9022	DC-110G/7047	DC-110W	DC-110E	DC-110B	110	110宽线槽	
DC-120G	DC-120G/9022	DC-120G/7047	DC-120W	DC-120E	DC-120B	120	120宽线槽	Pcs/Branch 2M
DC-125G	DC-125G/9022	DC-125G/7047	DC-125W	DC-125E	DC-125B	125	125宽线槽	
DC-140G	DC-140G/9022	DC-140G/7047	DC-140W	DC-140E	DC-140B	140	140宽线槽	
DC-150G	DC-150G/9022	DC-150G/7047	DC-150W	DC-150E	DC-150B	150	150宽线槽	
DC-200G	DC-200G/9022	DC-200G/7047	DC-200W	DC-200E	DC-200B	200	200宽线槽	
型号 Item No.						宽 Wide W	适合线槽规格 Suitable wiring duct Specifications	标准长度 Standard Length
灰色 Gray	浅灰色RAL9022 Light gray	灰白色RAL7047 Gray white	白色 White	蓝色 Blue	黑色 Black			
DC-25T	DC-25T/9022	DC-25T/7047	DC-25TW	DC-25TE	DC-25TB	25	25宽线槽	每支 2米
DC-40T	DC-40T/9022	DC-40T/7047	DC-40TW	DC-40TE	DC-40TB	40	40宽线槽	
DC-60T	DC-60T/9022	DC-60T/7047	DC-60TW	DC-60TE	DC-60TB	60	60宽线槽	
DC-80T	DC-80T/9022	DC-80T/7047	DC-80TW	DC-80TE	DC-80TB	80	80宽线槽	
DC-100T	DC-100T/9022	DC-100T/7047	DC-100TW	DC-100TE	DC-100TB	100	100宽线槽	

RCCN 日成DC-HF型耐高温无卤线槽盖 Halogen Free Duct Covers

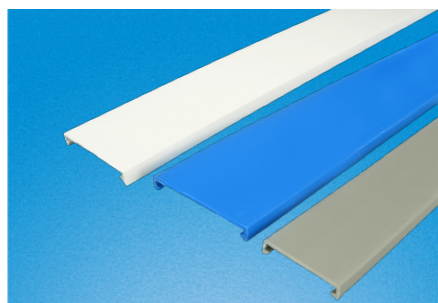

产品材质:采用无卤硬质料制成,环保无污染,不含铅等有毒物。

工作温度:静态-40°C持续高温至110°C。

Material:zero halogen, lead free and environment-friendly rigid PVCs

Work temperature:-40°C to 110 °C

型号 Item No.			宽 Wide W	适合线槽规格 Suitable wiring duct Specifications	标准长度 Standard Length
灰色 Gray	乳白色 Milk white	蓝色 Blue			
DC-20HF	DC-20HFW	DC-20HFE	20	20宽线槽	Pcs/Branch 2M 每支2米
DC-25HF	DC-25HFW	DC-25HFE	25	25宽线槽	
DC-30HF	DC-30HFW	DC-30HFE	30	30宽线槽	
DC-33HF	DC-33HFW	DC-33HFE	33	33宽线槽	
DC-35HF	DC-35HFW	DC-35HFE	35	35宽线槽	
DC-40HF	DC-40HFW	DC-40HFE	40	40宽线槽	
DC-50HF	DC-50HFW	DC-50HFE	50	50宽线槽	
DC-60HF	DC-60HFW	DC-60HFE	60	60宽线槽	
DC-75HF	DC-75HFW	DC-75HFE	75	75宽线槽	
DC-80HF	DC-80HFW	DC-80HFE	80	80宽线槽	
DC-100HF	DC-100HFW	DC-100HFE	100	100宽线槽	Pcs/Branch 2M
DC-120HF	DC-120HFW	DC-120HFE	120	120宽线槽	

WWW.RCCN.COM.CN