


## RCCN 日成LDPE波纹管 Polyethylene Corrugated Tubing

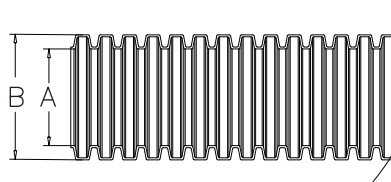

Ral9005  
Ral7037

单位/Unit:mm

材质:LDPE 聚乙烯 (Polyethylene)  
温度:-30 -100 ,短时110  
结构:内部和外表均为波浪型。  
颜色:黑色RAL9005,深灰色RAL7037  
其它颜色可选购有起订量要求

产品认证: 欧洲CE, 欧洲环保ROHS, REACH.

特性:表面好的光泽;柔软;  
用途:可保护电线电缆不受外力磨损及绝缘承载能力:不容易变形,但可以迅速恢复,并且本身无任何损伤。

应用场合:机器机柜、机床制造、电力设备、自动化装置、食品、包装等机械;

使用方法:将电线电缆穿入管内,再配合日成系列软管接头使用即可。

备注:带\*号为常规备货型号。  
特殊包装长度有起订量要求,测试温度以日成高低温机测试合格为准,使用需根据现场环境为准。

Material:LDPE (Polyethylene)  
Work Temperature:-30 to100 ,110 in short time

Color:black/ral9005,gray/ral7037

Certificates: CE,ROHS,REACH.

Characheristics:good luster of exterior, stronger machinism loading, perfect flexible


Functions:insulated,protect cables and wires Loading ability:uneasy to change shape,reshape speedly without hurt body  
Where to use:Equipment,machines, electricity sets, and so on

How to use:insert cables or wires to RCCN flexible conduit

Remarks:the items with \* are available in stock.special packing length come with MOQ work temperature tested according to RCCN factory test machines

| 型号 Item No.         |                     | 规格     | 内径<br>I.D. | 外径<br>O.D. | 静态<br>弯曲<br>半径<br>Stat.r | 动态<br>弯曲<br>半径<br>Dyn.r | 包装<br>Packing<br>M |
|---------------------|---------------------|--------|------------|------------|--------------------------|-------------------------|--------------------|
| 黑色 Black<br>Ral9005 | 深灰色 Gray<br>Ral7037 | Sizes  | A          | B          |                          |                         |                    |
| BG-07B/LDPE         | BG-07G/LDPE         | 1/4"   | 6.5        | 10.0       | 15                       | 35                      | 100M               |
| BG-10B/LDPE         | BG-10G/LDPE         | 5/16"  | 10.0       | 13.0       | 20                       | 45                      | 100M               |
| BG-12B/LDPE         | BG-12G/LDPE         | -      | 12.0       | 15.8       | 25                       | 55                      | 100M               |
| BG-15B/LDPE         | BG-15G/LDPE         | 3/8"   | 14.3       | 18.5       | 35                       | 65                      | 100M               |
| BG-17B/LDPE         | BG-17G/LDPE         | 1/2"   | 17.0       | 21.2       | 40                       | 75                      | 100M               |
| BG-23B/LDPE         | BG-23G/LDPE         | 3/4"   | 23.0       | 28.5       | 45                       | 100                     | 50M                |
| BG-29B/LDPE         | BG-29G/LDPE         | 1"     | 29.0       | 34.5       | 55                       | 120                     | 50M                |
| BG-36B/LDPE         | BG-36G/LDPE         | 1 1/4" | 36.0       | 42.5       | 65                       | 150                     | 50M                |
| BG-48B/LDPE         | BG-48G/LDPE         | 2"     | 48.0       | 54.5       | 80                       | 190                     | 25M                |
| BG-08B/LDPE         | BG-08G/LDPE         | 9/32"  | 8.0        | 11.5       | 13                       | 25                      | 100M               |
| BG-11B/LDPE         | BG-11G/LDPE         | -      | 11.0       | 14.0       | 20                       | 45                      | 100M               |
| BG-16B/LDPE         | BG-16G/LDPE         | -      | 14.5       | 20.0       | 25                       | 55                      | 100M               |
| BG-20B/LDPE         | BG-20G/LDPE         | -      | 20.0       | 25.0       | 50                       | 85                      | 50M                |
| BG-25B/LDPE         | BG-25G/LDPE         | -      | 25.5       | 31.5       | 50                       | 110                     | 50M                |

## RCCN 日成LDPEV0阻燃波纹管 Polyethylene Corrugated Tubing

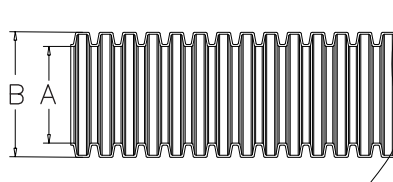

Ral9005  
Ral7037

单位/Unit:mm

材质:LDPE 聚乙烯 (Polyethylene)  
温度:-30 -100 ,短时110  
结构:内部和外表均为波浪型。  
颜色:黑色RAL9005,深灰色RAL7037  
产品认证: 欧洲CE,ROHS.

防火等级:94-V0。

特性:表面好的光泽;柔软;  
用途:可保护电线电缆不受外力磨损及绝缘

承载能力:不容易变形,但可以迅速恢复,并且本身无任何损伤。

应用场合:机器机柜、机床制造、电力设备、自动化装置、食品、包装等机械;

使用方法:将电线电缆穿入管内,再配合日成系列软管接头使用即可。

备注:特殊包装长度有起订量要求,测试温度以日成高低温机测试合格为准,使用需根据现场环境为准。另备环保型阻燃管,有起订量要求。

Material:LDPE (Polyethylene)  
Work Temperature:-30 to100 ,110 in short time

Color:Color:black/ral9005,gray/ral7037

Certificates: CE,ROHS

Inflaming retarding rate:V-0

Characheristics:good luster of exterior, stronger machinism loading, perfect flexible

Functions:insulated,protect cables and wires

Loading ability:uneasy to change shape,reshape speedly without hurt body  
Where to use:Equipment,machines, electricity sets, and so on.

How to use:insert cables or wires to RCCN flexible conduit

Remarks:the items with \* are available in stock. special packing length come with MOQ work temperature tested according to RCCN factory test machines

| 型号 Item No.         |                     | 规格     | 内径<br>I.D. | 外径<br>O.D. | 静态<br>弯曲<br>半径<br>Stat.r | 动态<br>弯曲<br>半径<br>Dyn.r | 包装<br>Packing<br>M |
|---------------------|---------------------|--------|------------|------------|--------------------------|-------------------------|--------------------|
| 黑色 Black<br>Ral9005 | 深灰色 Gray<br>Ral7037 | Sizes  | A          | B          |                          |                         |                    |
| BG-07BV0/LDPE       | BG-07GV0/LDPE       | 1/4"   | 6.5        | 10.0       | 15                       | 35                      | 100M               |
| BG-10BV0/LDPE       | BG-10GV0/LDPE       | 5/16"  | 10.0       | 13.0       | 20                       | 45                      | 100M               |
| BG-12BV0/LDPE       | BG-12GV0/LDPE       | -      | 12.0       | 15.8       | 25                       | 55                      | 100M               |
| BG-15BV0/LDPE       | BG-15GV0/LDPE       | 3/8"   | 14.3       | 18.5       | 35                       | 65                      | 100M               |
| BG-17BV0/LDPE       | BG-17GV0/LDPE       | 1/2"   | 17.0       | 21.2       | 40                       | 75                      | 100M               |
| BG-23BV0/LDPE       | BG-23GV0/LDPE       | 3/4"   | 23.0       | 28.5       | 45                       | 100                     | 50M                |
| BG-29BV0/LDPE       | BG-29GV0/LDPE       | 1"     | 29.0       | 34.5       | 55                       | 120                     | 50M                |
| BG-36BV0/LDPE       | BG-36GV0/LDPE       | 1 1/4" | 36.0       | 42.5       | 65                       | 150                     | 50M                |
| BG-48BV0/LDPE       | BG-48GV0/LDPE       | 2"     | 48.0       | 54.5       | 80                       | 190                     | 25M                |
| BG-08BV0/LDPE       | BG-08GV0/LDPE       | 9/32"  | 8.0        | 11.5       | 13                       | 25                      | 100M               |
| BG-11BV0/LDPE       | BG-11GV0/LDPE       | -      | 11.0       | 14.0       | 20                       | 45                      | 100M               |
| BG-16BV0/LDPE       | BG-16GV0/LDPE       | -      | 14.5       | 20.0       | 25                       | 55                      | 100M               |
| BG-20BV0/LDPE       | BG-20GV0/LDPE       | -      | 20.0       | 25.0       | 50                       | 85                      | 50M                |
| BG-25BV0/LDPE       | BG-25GV0/LDPE       | -      | 25.5       | 31.5       | 50                       | 110                     | 50M                |