


RCCN 日成PA尼龙波纹管 Polyethylene Corrugated Tubing

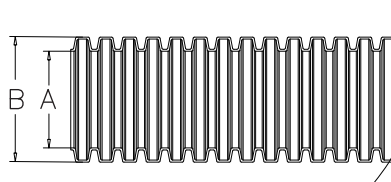

Ral9005
Ral7037

单位/Unit:mm

材 质: 进口PA6 尼龙(Polyamide)
温 度: -40°C-125°C, 短时达到150°C
产品认证: 美国UL, 欧洲CE, 欧洲环保
ROHS, REACH.

防火等级: 94HB.

特 性: 柔软有韧性, 抗扭曲; 机械, 强度好可以承受重的负载; 耐酸, 耐切割屑液, 润滑油, 冷却液等; 表面有光泽, 耐摩擦; 黑色耐紫外线, 机械强度高; 用 途: 可保护电线电缆不受外力磨损及绝缘承载能力: 可以承受脚踩和更高强度的重压, 不变形, 但可以迅速恢复并且本身无任何损伤.

应用场合: 风电发电, 地铁轨道, 电力机车的车厢内使用; 机械制造, 电气绝缘保护, 公共交通

设备: 照明设备; 汽车制造; 航空设备;

使用方法: 将电线电缆穿入管内, 再配合日成系列软管接头使用即可.

备 注: 特殊按包装长度有起订量要求.

Material: PA (Polyamide)
Work Temperature: -40°C to 125°C,
150°C in short time

Color: black

Certificates: CE, ROHS, REACH.

Characteristics: good luster of exterior, stronger mechanism loading, perfect flexible

Functions: insulated, protect cables and wires

Loading ability: uneasy to change shape, reshape speedily without hurt body

Where to use: Equipment, machines, electricity sets, and so on.


How to use: insert cables or wires to RCCN flexible conduit

Remarks: special packing length come with MOQ work temperature tested according to RCCN factory

test machines

型号	Item No.	规格	内径	外径	静态弯曲半径	动态弯曲半径	包装
黑色 Black	深灰色 Gray	Sizes	I.D.	O.D.	Stat.r	Dyn.r	Packing
Ral9005	Ral7037		A	B			M
BG-07NB	BG-07NG	1/4"	6.5	10.0	13	35	100M
BG-10NB	BG-10NG	5/16"	10.0	13.0	20	45	100M
BG-12NB	BG-12NG	-	12.0	15.8	35	55	100M
BG-15NB	BG-15NG	3/8"	14.3	18.5	40	65	100M
BG-17NB	BG-17NG	1/2"	17.0	21.2	45	75	100M
BG-23NB	BG-23NG	3/4"	23.0	28.5	55	100	50M
BG-29NB	BG-29NG	1"	29.0	34.5	65	120	50M
BG-36NB	BG-36NG	1 1/4"	36.0	42.5	90	150	50M
BG-48NB	BG-48NG	2"	48.0	54.5	100	190	25M
BG-08NB	BG-08NG	9/32"	8.0	11.5	13	25	100M
BG-11NB	BG-11NG	-	11.0	14.0	20	45	100M
BG-16NB	BG-16NG	-	14.5	20.0	45	75	100M
BG-20NB	BG-20NG	-	20.0	25.0	50	85	50M
BG-25NB	BG-25NG	-	25.5	31.5	50	110	50M

RCCN 日成PA尼龙阻燃波纹管 Polyethylene Corrugated Tubing

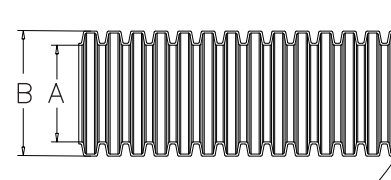

Ral9005
Ral7037

单位/Unit:mm

材 质: 进口PA6 尼龙(Polyamide)
温 度: -40°C-125°C, 短时达到150°C
产品认证: 美国UL, 欧洲CE, 欧洲环保
ROHS, REACH.

防火等级: 94V0.

特 性: 柔软有韧性, 抗扭曲; 机械, 强度好可以承受重的负载; 耐酸, 耐切割屑液, 润滑油, 冷却液等; 表面有光泽, 耐摩擦; 黑色耐紫外线, 机械强度高; 用 途: 可保护电线电缆不受外力磨损及绝缘承载能力: 可以承受脚踩和更高强度的重压, 不变形, 但可以迅速恢复并且本身无任何损伤.

应用场合: 风电发电, 地铁轨道, 电力机车的车厢内使用; 机械制造, 电气绝缘保护, 公共交通

设备: 照明设备; 汽车制造; 航空设备;

使用方法: 将电线电缆穿入管内, 再配合日成系列软管接头使用即可.

备 注: 特殊按包装长度有起订量要求.

Material: PA (Polyamide)
Work Temperature: -40°C to 125°C,
150°C in short time

Color: black

Certificates: CE, ROHS, REACH.

Characteristics: good luster of exterior, stronger mechanism loading, perfect flexible

Functions: insulated, protect cables and wires

Loading ability: uneasy to change shape, reshape speedily without hurt body

Where to use: Equipment, machines, electricity sets, and so on.

How to use: insert cables or wires to RCCN flexible conduit

Remarks: special packing length come with MOQ work temperature tested according to RCCN factory test machines

型号	Item No.	规格	内径	外径	静态弯曲半径	动态弯曲半径	包装
黑色 Black	深灰色 Gray	Sizes	I.D.	O.D.	Stat.r	Dyn.r	Packing
Ral9005	Ral7037		A	B			M
BG-07NBV0	BG-07NGV0	1/4"	6.5	10.0	13	35	100M
BG-10NBV0	BG-10NGV0	5/16"	10.0	13.0	20	45	100M
BG-12NBV0	BG-12NGV0	-	12.0	15.8	35	55	100M
BG-15NBV0	BG-15NGV0	3/8"	14.3	18.5	40	65	100M
BG-17NBV0	BG-17NGV0	1/2"	17.0	21.2	45	75	100M
BG-23NBV0	BG-23NGV0	3/4"	23.0	28.5	55	100	50M
BG-29NBV0	BG-29NGV0	1"	29.0	34.5	65	120	50M
BG-36NBV0	BG-36NGV0	1 1/4"	36.0	42.5	90	150	50M
BG-48NBV0	BG-48NGV0	2"	48.0	54.5	100	190	25M
BG-08NBV0	BG-08NGV0	9/32"	8.0	11.5	13	25	100M
BG-11NBV0	BG-11NGV0	-	11.0	14.0	20	45	100M
BG-16NBV0	BG-16NGV0	-	14.5	20.0	45	75	100M
BG-20NBV0	BG-20NGV0	-	20.0	25.0	50	85	50M
BG-25NBV0	BG-25NGV0	-	25.5	31.5	50	110	50M