




## RCCN 日成HDPE波纹管 Polyethylene Corrugated Tubing

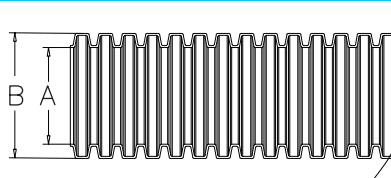

单位/Unit:mm

材 质:HDPE 聚乙烯 (Polyethylene)  
 温 度:-30°C-100°C, 短时110°C  
 结 构:内部和外表均为波浪型。  
 颜 色:黑色RAL9005,深灰色RAL7037  
 其它颜色可选购有起订量要求。

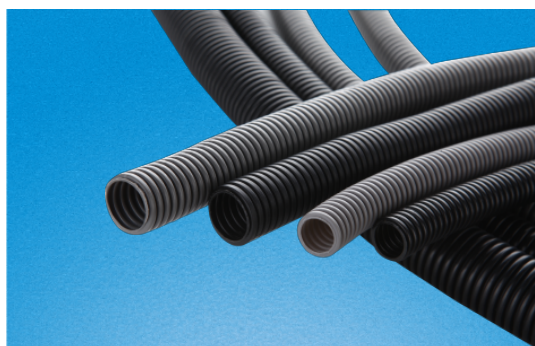


产品认证: 欧洲CE, 欧洲环保ROHS, REACH.  
 特 性:表面好的光泽;机械承载强度好;好的柔软性能;  
 用 途:可保护电线电缆不受外力磨损及绝缘承载能力:不容易变形, 但可以迅速恢复, 并且本身无任何损伤。  
 应用场合:机器机柜、机床制造、电力设备、自动化装置、食品、包装等机械;  
 使用方法:将电线电缆穿入管内, 再配合日成系列软管接头使用即可。  
 备 注:带\*号为常规备货型号。  
 特殊包装长度有起订量要求, 测试温度以日成高低温机测试合格为准, 使用需根据现场环境为准。

Material:HDPE (Polyethylene)  
 Work Temperature:-30°C to 100°C, 110°C in short time  
 Color:black/ral9005,gray/ral7037  
 Certificates: CE,ROHS,REACH.  
 Characteristics:good luster of exterior, stronger machinism loading, perfect flexible  
 Functions:insulated,protect cables and wires Loading ability:uneasy to change shape,reshape speedly without hurt body  
 Where to use:Equipment,machines, electricity sets, and so on  
 How to use:insert cables or wires to RCCN flexible conduit  
 Remarks:the items with \* are available in stock.special packing length come with MOQ work temperature tested according to RCCN factory test machines

| 型号       | Item No. | 规格     | 内径   | 外径    | 静态弯曲半径 | 动态弯曲半径 | 包装      |
|----------|----------|--------|------|-------|--------|--------|---------|
| 黑色 Black | 深灰色 Gray | Sizes  | I.D. | O.D.  | Stat.r | Dyn.r  | Packing |
| Ral9005  | Ral7037  |        | A    | B     |        |        | M       |
| BG-07B   | BG-07G   | 1/4"   | 6.5  | 10.0  | 15     | 35     | 100M    |
| BG-10B   | BG-10G   | 5/16"  | 10.0 | 13.0  | 20     | 45     | 100M    |
| BG-12B   | BG-12G   | -      | 12.0 | 15.8  | 25     | 55     | 100M    |
| BG-15B   | BG-15G   | 3/8"   | 14.3 | 18.5  | 35     | 65     | 100M    |
| BG-17B   | BG-17G   | 1/2"   | 17.0 | 21.2  | 40     | 75     | 100M    |
| BG-23B   | BG-23G   | 3/4"   | 23.0 | 28.5  | 45     | 100    | 50M     |
| BG-29B   | BG-29G   | 1"     | 29.0 | 34.5  | 55     | 120    | 50M     |
| BG-36B   | BG-36G   | 1 1/4" | 36.0 | 42.5  | 65     | 150    | 50M     |
| BG-48B   | BG-48G   | 2"     | 48.0 | 54.5  | 80     | 190    | 25M     |
| BG-08B   | BG-08G   | 9/32"  | 8.0  | 11.5  | 13     | 25     | 100M    |
| BG-11B   | BG-11G   | -      | 11.0 | 14.0  | 20     | 45     | 100M    |
| BG-16B   | BG-16G   | -      | 14.5 | 20.0  | 25     | 55     | 100M    |
| BG-20B   | BG-20G   | -      | 20.0 | 25.0  | 50     | 85     | 50M     |
| BG-25B   | BG-25G   | -      | 25.5 | 31.5  | 50     | 110    | 50M     |
| BG-56B   | -        | -      | 56.0 | 68.0  | -      | -      | 10M     |
| BG-63B   | -        | 2 1/2" | 63.0 | 74.0  | -      | -      | 10M     |
| BG-67B   | -        | 2 1/2" | 67.0 | 80.0  | -      | -      | 10M     |
| BG-76B   | -        | 3"     | 76.0 | 88.0  | -      | -      | 10M     |
| BG-94B   | -        | 4"     | 94.0 | 108.0 | -      | -      | 10M     |

## RCCN 日成HDPEV0阻燃波纹管 Polyethylene Corrugated Tubing

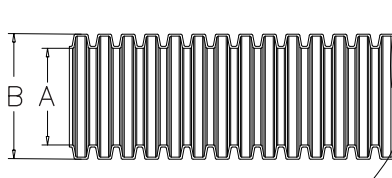

单位/Unit:mm

材 质:HDPE 聚乙烯 (Polyethylene)  
 温 度:-30°C-100°C, 短时110°C  
 结 构:内部和外表均为波浪型。  
 颜 色:黑色RAL9005,深灰色RAL7037  
 产品认证: 欧洲CE,ROHS.  
 防火等级:94-V0。

特 性:表面好的光泽;机械承载强度好;好的柔软性能;  
 用 途:可保护电线电缆不受外力磨损及绝缘承载能力:不容易变形, 但可以迅速恢复, 并且本身无任何损伤。  
 应用场合:机器机柜、机床制造、电力设备、自动化装置、食品、包装等机械;  
 使用方法:将电线电缆穿入管内, 再配合日成系列软管接头使用即可。  
 备 注:特殊包装长度有起订量要求, 测试温度以日成高低温机测试合格为准, 使用需根据现场环境为准。另备环保型阻燃管,有起订量要求。

Material:HDPE (Polyethylene)  
 Work Temperature:-30°C to 100°C, 110°C in short time  
 Color:Color:black/ral9005,gray/ral7037  
 Certificates: CE,ROHS  
 Inflaming retarding rate:V-0  
 Characteristics:good luster of exterior, stronger machinism loading, perfect flexible  
 Functions:insulated,protect cables and wires  
 Loading ability:uneasy to change shape,reshape speedly without hurt body  
 Where to use:Equipment,machines, electricity sets, and so on.  
 How to use:insert cables or wires to RCCN flexible conduit  
 Remarks:the items with \* are available in stock. special packing length come with MOQ work temperature tested according to RCCN factory test machines

| 型号       | Item No. | 规格     | 内径   | 外径   | 静态弯曲半径 | 动态弯曲半径 | 包装      |
|----------|----------|--------|------|------|--------|--------|---------|
| 黑色 Black | 深灰色 Gray | Sizes  | I.D. | O.D. | Stat.r | Dyn.r  | Packing |
| Ral9005  | Ral7037  |        | A    | B    |        |        | M       |
| BG-07BV0 | BG-07GV0 | 1/4"   | 6.5  | 10.0 | 15     | 35     | 100M    |
| BG-10BV0 | BG-10GV0 | 5/16"  | 10.0 | 13.0 | 20     | 45     | 100M    |
| BG-12BV0 | BG-12GV0 | -      | 12.0 | 15.8 | 25     | 55     | 100M    |
| BG-15BV0 | BG-15GV0 | 3/8"   | 14.3 | 18.5 | 35     | 65     | 100M    |
| BG-17BV0 | BG-17GV0 | 1/2"   | 17.0 | 21.2 | 40     | 75     | 100M    |
| BG-23BV0 | BG-23GV0 | 3/4"   | 23.0 | 28.5 | 45     | 100    | 50M     |
| BG-29BV0 | BG-29GV0 | 1"     | 29.0 | 34.5 | 55     | 120    | 50M     |
| BG-36BV0 | BG-36GV0 | 1 1/4" | 36.0 | 42.5 | 65     | 150    | 50M     |
| BG-48BV0 | BG-48GV0 | 2"     | 48.0 | 54.5 | 80     | 190    | 25M     |
| BG-08BV0 | BG-08GV0 | 9/32"  | 8.0  | 11.5 | 13     | 25     | 100M    |
| BG-11BV0 | BG-11GV0 | -      | 11.0 | 14.0 | 20     | 45     | 100M    |
| BG-16BV0 | BG-16GV0 | -      | 14.5 | 20.0 | 25     | 55     | 100M    |
| BG-20BV0 | BG-20GV0 | -      | 20.0 | 25.0 | 50     | 85     | 50M     |
| BG-25BV0 | BG-25GV0 | -      | 25.5 | 31.5 | 50     | 110    | 50M     |