


RCCN 日成SR型闭口推式尼龙铆钉 Push Snap Rivets



材质:UL 合格之NYLON66,防火等级94V-2, 不易老化.

用途:PC板及机板之固定, 取代螺丝, 不需工具即可完成装配.

特点:容易固定.

用法:先将机板及被固定板钻孔,再将本产品塞入,即可使两板相线合.


板厚:以H长度小5mm为准.

开孔:建议表格孔径负公差0.2-1mm开孔.

Material : NYLON66 UL approved,

Fireproof : 94V-2 Good quality,easy to install

单位/Unit:mm

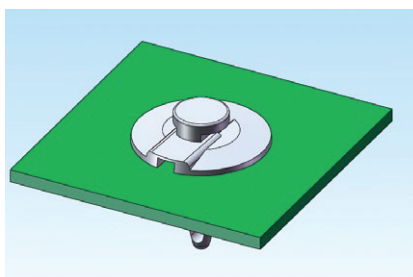

型号 Item No.	头部 Head W	孔径 Hole dia. W1	长度 Length H	包装 Packing pcs
SR4-152	7.0	4.7	12.1	100pcs
SR6-47	18.0	6.3	13.1	100pcs
SR6-193	17.4	6.3	20.8	100pcs
SR6-559	15.0	6.0	23.0	100pcs
SR6-43	17.4	6.3	23.0	100pcs
SR6-195	18.9	6.3	29.3	100pcs
SR6-542	15.8	6.3	15.8	100pcs
SR6-672	15.0	6.3	19.0	100pcs
SR6-659	17.0	6.5	16.0	100pcs
SR6-574	14.0	6.0	16.0	100pcs
SR7-831	20	7.0	17.0	100pcs
SR7-333	16.0	7.0	12.0	100pcs
SR7-71	20.5	7.9	28.0	100pcs
SR8-569	15.0	8.0	20.0	100pcs
SR8-568	20.0	8.0	20.0	100pcs
SR8-605	25.4	8.0	25.4	100pcs
SR8-645	18.2	8.0	23.0	100pcs
SR8-69	15.0	8.0	29.4	100pcs
SR8-1147	16.1	8.5	14.5	100pcs
SR9-168	17.9	9.5	23.2	100pcs
SR9-611	18.0	9.0	28.0	100pcs
SR9-584	19.0	9.0	26.0	100pcs
SR11-576	30.1	11.1	50.8	100pcs
SR12-39	22.1	12.7	26.0	100pcs
SR12-117	25.4	12.7	29.5	100pcs
SR12-159	25.4	12.7	25.6	100pcs
SR12-598	25.4	12.7	44.4	100pcs
SR12-160	25.0	12.7	27.5	100pcs
SR12-192	46.4	12.7	26.9	100pcs