


RCCN 日成NWS型夹线套 Narrow Wire Saddle-Arrowhead



NWS-A1

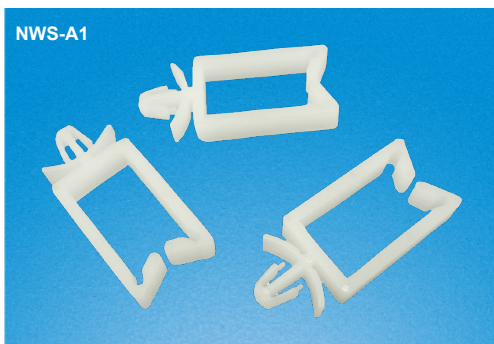

材质：UL合格之NYLON66(本色).
 防火等级:94V-2，绝缘性佳，不易老化。
 Material：UL approved NYLON66(natural).
 Fireproof：94V-2，good insulation,good aging resistant.


单位/Unit:mm

型 号 Item No.	A	B	孔径 Hole dia.	板厚 Board thickness	包装 Packing
NWS-A1-13.0	13.0	8.2	4.8	1.6	1000pcs
NWS-A1-18.0	18.0	8.2	4.8	1.6	
NWS-A1-26.9	26.9	8.2	4.8	1.6	
NWS-A1-34.8	34.8	8.2	4.8	1.6	
NWS-A2-13.0	13.0	9.8	4.8	3.2	
NWS-A2-18.0	18.0	9.8	4.8	3.2	
NWS-A2-26.9	26.9	9.8	4.8	3.2	
NWS-A2-34.8	34.8	9.8	4.8	3.2	

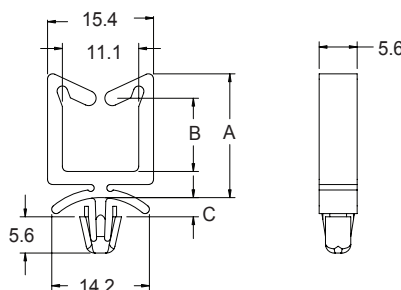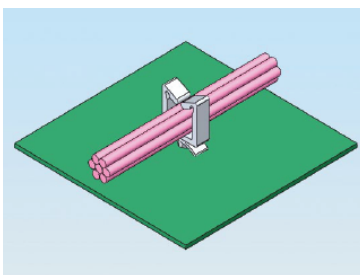

RCCN 日成LWS型夹线套 Locking Wire Saddle Arrowhead Mount

LWS-A1

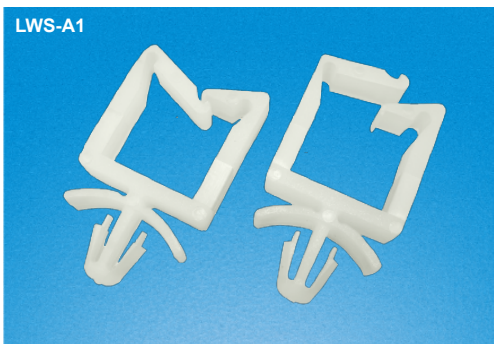

材质：UL合格之NYLON66(本色).
 防火等级: 94V-2，绝缘性佳，不易老化。
 Material：UL approved NYLON66(natural).
 Fireproof 94V-2，good insulation,good aging resistant.

单位/Unit:mm

型 号 Item No.	A	B	孔径 Hole dia.	板厚 Board thickness	包装 Packing
LWS-A1-13.0	13.0	8.3	4.8	1.6	1000pcs
LWS-A1-18.0	18.0	8.3	4.8	1.6	
LWS-A1-27.2	27.2	8.3	4.8	1.6	
LWS-A1-35.1	35.1	8.3	4.8	1.6	
LWS-A2-13.0	13.0	9.9	4.8	3.2	
LWS-A2-18.0	18.0	9.9	4.8	3.2	
LWS-A2-27.2	27.2	9.9	4.8	3.2	
LWS-A2-35.1	35.1	9.9	4.8	3.2	

