





RCCN 日成CBS型粘式隔离柱 Circuit Board Support on Base

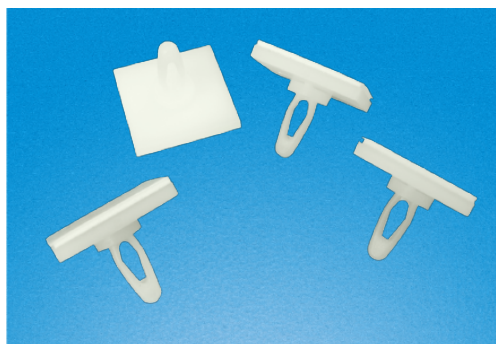



材质：UL合格之NYLON66(本色)，防火等级94V-2，绝缘性佳，不易老化。
Material：UL approved NYLON66(natural).
Fireproof 94V-2，good insulation,good aging resistant

单位/Unit:mm

型 号 Item No.		孔径 Hole dia.	板厚 Board thickness	间距 Instance A	包装 Packing
CBS	CBS2				
CBS-4.8	CBS2-4.8	4.0	1.6	4.8	1000pcs
CBS-6.4	CBS2-6.4	4.0	1.6	6.4	
CBS-9.5	CBS2-9.5	4.0	1.6	9.5	
CBS-12.7	CBS2-12.7	4.0	1.6	12.7	
CBS-15.9	CBS2-15.9	4.0	1.6	15.9	
CBS-19.1	CBS2-19.1	4.0	1.6	19.1	
CBS-22.2	CBS2-22.2	4.0	1.6	22.2	
CBS-25.4	CBS2-25.4	4.0	1.6	25.4	
CBS-28.6	CBS2-28.6	4.0	1.6	28.6	


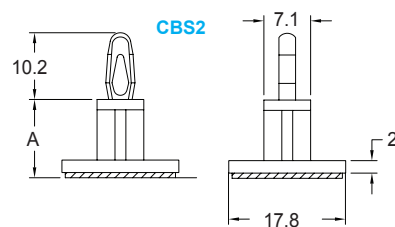
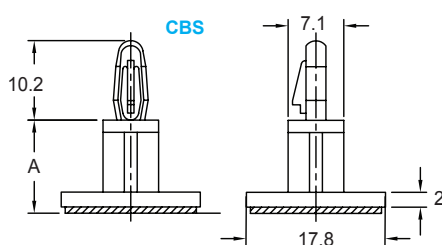


单位/Unit:mm

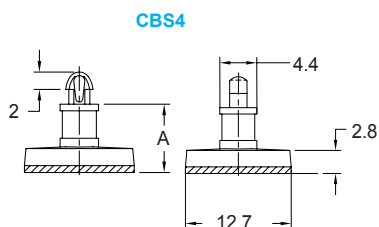

型 号 Item No.		孔径 Hole dia.	板厚 Board thickness	间距 Instance A	包装 Packing
CBS3-4.8		3.2	1.6	4.8	1000pcs
CBS3-6.4		3.2	1.6	6.4	
CBS3-9.5		3.2	1.6	9.5	
CBS3-11.1		3.2	1.6	11.1	
CBS3-12.7		3.2	1.6	12.7	
CBS3-15.9		3.2	1.6	15.9	
CBS4-4.8		3.2	1.6	4.8	
CBS4-6.4		3.2	1.6	6.4	
CBS4-9.5		3.2	1.6	9.5	1000pcs
CBS4-11.1		3.2	1.6	11.1	
CBS4-12.7		3.2	1.6	12.7	
CBS4-15.9		3.2	1.6	15.9	

RCCN 日成MP型单体尼龙铆钉 Nylon Rivet

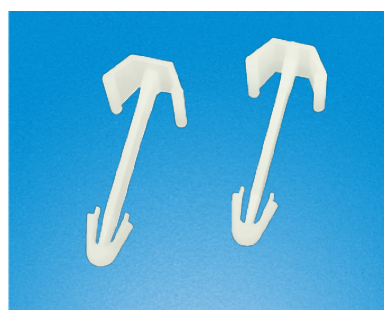

单位/Unit:mm

型 号 Item No.		孔径 Hole dia.	板厚 Board thickness	间距 Instance A	包装 Packing
MP-0.8		4.0	0.8-2.4	0.8	1000pcs
MP-2.4		4.0	2.4-4.8	2.4	
MP-4.8		4.0	4.8-5.6	4.8	
MP-5.6		4.0	5.6-7.9	5.6	
MP-7.9		4.0	7.9-9.5	9.5	
MP-9.5		4.0	9.5-11.1	11.1	
MP-11.1		4.0	11.1-12.7	12.7	
MP-12.7		4.0	12.7-14.3	14.3	
MP-14.3		4.0	14.3-15.9	15.9	