




RCCN 日成RH型圆型夹线套 Wir Saddle

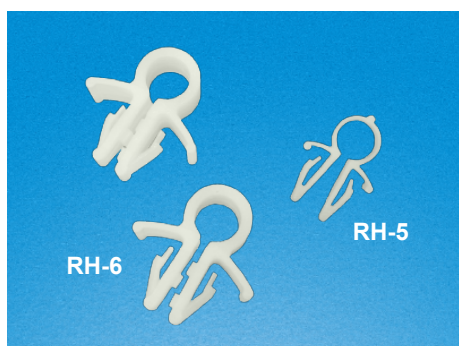


材质：UL合格之NYLON66(本色),
防火等级94V-2,不易老化,绝缘度高.可作任何方向与角度的固定电线之用。
Material：UL approved NYLON66(natural), fireproof 94V-2, good insulation

单位/Unit:mm

型 号 Item No.	尺寸 Dimension				包装 Packing
	A	B	基板开孔 Panel hole	适用板厚 Suitable panel thickness	
RH-5	5.1	8.0	5.5	2.0	100pcs (1000pcs)
RH-6	6.2	9.5	8	1.8	
RH-8	7.5	11.5	6.2	2.0	
RH-9	9.6	18.0	9.5	2.0	

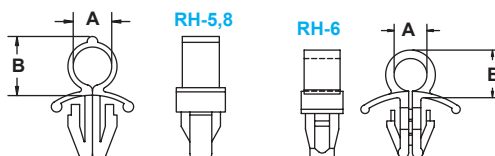

单位/Unit:mm

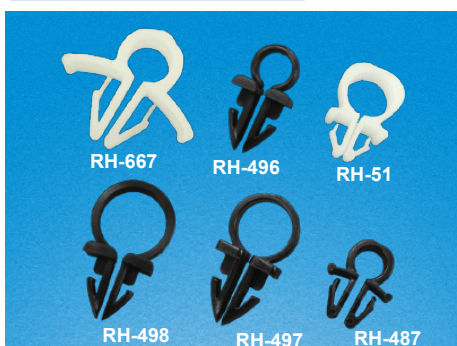

型 号 Item No.	尺寸 Dimension				包装 Packing
	A	H	基板开孔 Panel hole	适用板厚 Suitable panel thickness	
RH-51	8.8	19	6.0	3.0-3.3	100pcs (1000pcs)
RH-496	6.3	21.6	6.5	1.2-4.4	
RH-497	9.5	24	6.2	1.3-5.0	
RH-498	12.7	27.0	5.5	1.2-4.2	
RH-487	5.0	15.2	5.0	2.5	
RH-667	6.0	17.5	7.0	4.0	

单位/Unit:mm



型 号 Item No.	尺寸 Dimension				包装 Packing
	A	H	基板开孔 Panel hole	适用板厚 Suitable panel thickness	
RH-52	14.0	36.0	7.0	5.0	100pcs (1000pcs)
RH-53	20.0	44.0	6.5	4.5	
RH-54	12.0	35.0	7.5	4.5	
RH-59	10.0	34.0	7.0	5.0	
RH-648	7.5	40.0	7.0	4-10	

本系列均为可开式结构,适合电线安装后需要不定期打开或检查维护。

This series can be produced into opening design,it need to open and check the cables after installing

单位/Unit:mm



型 号 Item No.	尺寸 Dimension				包装 Packing
	A	H	基板开孔 Panel hole	适用板厚 Suitable panel thickness	
RH-50	14.0	24.0	7.0	3.0	100pcs
RH-502	7.0	22.5	5.0	2.0	
RH-488	8.0	29.0	6.5	2.5	
RH-549	7.0	19.0	7	2.0	

