

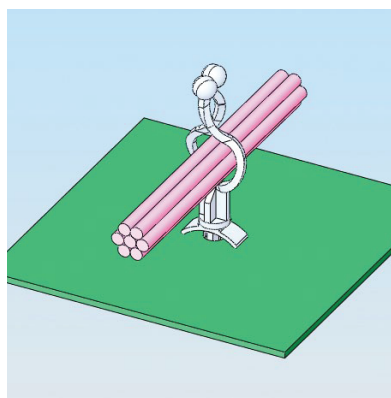



RCCN 日成ST型隔离扭线环 Standoff Twist Tie

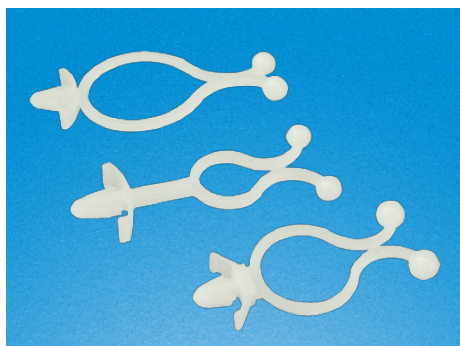

ST




基板孔4.8mm
Panel hole 4.8mm




ST-0605

鐵板孔徑4mm
Panel drill 4mm



ST-3C

基板孔4mm
Panel hole 4mm



ST-3D

材质：UL合格之NYLON66(本色).

防火等级：94V-2,不易老化,绝缘度高。

用法：基板钻孔4.8mm,先把夹线套固定,再将欲固定之电线放入环中,即可将电线牢牢扣住,可作任何方向与角度的固定电线之用

Material：UL approved NYLON66(natural).

Fireproof: 94V-2 , good insulation,good aging resistant

单位/Unit:mm

型 号 Item No.	尺寸 Dimension					包装 Packing
	H1	H2	W	基板开孔 Panel hole	适用板厚 Suitable panel thickness	
ST-1	19.5	31.7	6.0	4.6-4.8	1.0-2.8	100pcs (1000pcs)
ST-2	27.8	21.2	11.0	4.8-5.0	1.0-2.8	
ST-3	27.3	4.7	10.4	4.6-4.8	1.0-2.8	
ST-3B	28.0	5.0	11.0	6.2-6.6	0.5-2.0	
ST-3C	32.0	5.0	15.0	4.6-4.8	0.5-1.6	
ST-3D	36.2	5.3	18.0	4.4-4.8	1.0-2.4	
ST-4S	27.9	13.0	11.0	4.2-4.8	1.0-2.4	
ST-4	31.3	11.1	15.0	4.6-4.8	1.0-2.0	
ST-0560	20.5	60.9	5.0	4.6-5.0	1.6-3.0	
ST-0605	19.3	5.3	6.1	4.0-4.4	2.4	
ST-0701	22.0	1.3	7.0	4.6-4.8	1.0-2.8	
ST-1112	26.8	15.3	11	4.6-4.8	1.6-3.0	
ST-1247	27.2	50.5	11	4.6-4.8	1.6-3.0	
ST-1303	45.0	3.0	13.5	6.6	1.8-3.6	
ST-1602	31.7	5.1	16.0	4.4-4.6	0.5-1.6	
ST-2005	36.5	5.1	20	7.2-7.6	1.8-3.6	
ST-2403	44.2	3.2	23.5	4.8-5.0	0.5-2.6	

型 号 Item No.	尺寸 Dimension					包装 Packing
	D	H2	W	基板开孔 Panel hole	适用板厚 Suitable panel thickness	
ST-0703A	10.6	3.1	7.1	4.8-5.0	1.0-3.2	100pcs (1000pcs)
ST-0720A	10.6	20.0	7.1	4.8-5.0	1.0-3.2	
ST-0735A	10.6	35.3	7.1	4.8-5.0	1.0-3.2	
ST-1003A	10.6	2.8	10.8	4.8-5.0	1.0-3.2	
ST-1020A	10.6	20.0	10.8	4.8-5.0	1.0-3.2	
ST-1035A	10.6	35.2	10.8	4.8-5.0	1.0-3.2	
ST-1503A	10.6	3.0	15	4.8-5.0	1.0-3.2	
ST-1520A	10.6	20.4	15	4.8-5.0	1.0-3.2	
ST-1535A	10.6	35.8	15	4.8-5.0	1.0-3.2	
ST-2016A	10.6	16.0	20	4.8-5.0	1.0-3.2	
ST-2503A	10.0	3.0	24.3	4.8-5.0	1.0-3.2	
ST-1115A	10.6	15.3	11.0	4.8-5.0	1.0-3.2	
ST-2005A	10.6	5.0	20.3	4.8-5.0	1.0-3.2	
ST-0810A	10.6	10.5	8	4.8-5.0	1.0-3.2	
ST-0906A	10.6	5.6	8.8	4.8-5.0	1.0-3.2	
ST-1021C	7.5	21.0	10.4	4.6-4.8	0.8-2.2	
ST-0534C	7.5	34.0	5.0	4.6-4.8	0.8-2.2	
ST-1005C	7.5	4.5	10.4	4.6-4.8	0.8-2.2	
ST-0703C	5.5	3.0	7.2	4.6-4.8	0.8-2.2	
ST-1043C	8.0	43.5	10.1	4.6-4.8	0.8-2.2	