



## RCCN 日成PV型全绝缘母端子 PV Insulated Female Terminals




| 型号<br>Item No. | AWG<br>mm <sup>2</sup><br>包装 | 尺寸 DIMENSION |         |           |           |         |         |         |
|----------------|------------------------------|--------------|---------|-----------|-----------|---------|---------|---------|
|                |                              | T×B1<br>mm   | B<br>mm | D φ<br>mm | d φ<br>mm | L<br>mm | F<br>mm | H<br>mm |
| PV1.25-187(5)  | 22-16                        | 0.5×4.75     | 5.6     | 3.8       | 1.7       | 20.0    | 6.0     | 10      |
| PV1.25-187(8)  | 0.5-1.5                      | 0.8×4.75     | 5.6     | 3.8       | 1.7       | 20.0    | 6.0     | 10      |
| PV1.25-250     | 1000PCS                      | 0.8×6.35     | 7.4     | 3.8       | 1.7       | 23.2    | 7.8     | 10      |
| PV2-187(5)     | 16-14                        | 0.5×4.75     | 5.6     | 4.0       | 2.3       | 20.0    | 6.0     | 10      |
| PV2-187(8)     | 1.5-2.5                      | 0.8×4.75     | 5.6     | 4.0       | 2.3       | 20.0    | 6.0     | 10      |
| PV2-250        | 1000PCS                      | 0.8×6.35     | 7.4     | 4.0       | 2.3       | 23.5    | 7.8     | 10      |
| PV5.5-250      | 12-10/ 4-6<br>500PCS         | 0.8×6.35     | 7.4     | 5.7       | 3.4       | 23.5    | 7.8     | 13      |

## RCCN 日成MF型钩式绝缘端子 MF Insulated Peggy Back Terminals

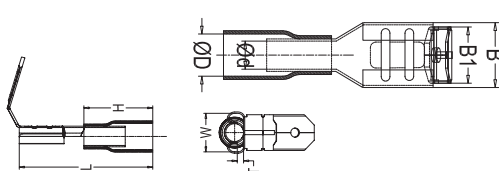

| 型号<br>Item No. | AWG<br>mm <sup>2</sup><br>包装 | 尺寸 DIMENSION |         |          |         |           |           |         |
|----------------|------------------------------|--------------|---------|----------|---------|-----------|-----------|---------|
|                |                              | T×W<br>mm    | B<br>mm | B1<br>mm | H<br>mm | D φ<br>mm | d φ<br>mm | L<br>mm |
| MF1.25-250     | 22-16/0.5-1.5<br>1000PCS     | 0.8×6.35     | 7.4     | 6.3      | 10.0    | 3.8       | 1.7       | 21.5    |
| MF2-250        | 16-14/1.5-2.5<br>1000PCS     | 0.8×6.35     | 7.4     | 6.3      | 10.0    | 4.3       | 2.3       | 21.5    |
| MF5.5-250      | 12-10/ 4-6<br>500PCS         | 0.8×6.35     | 7.4     | 6.3      | 13.5    | 5.7       | 3.4       | 25.0    |

## RCCN 日成DBF片形绝缘端子 DBF Insulated Terminals



| 型号<br>Item No. | AWG<br>mm <sup>2</sup><br>包装 | 尺寸 DIMENSION |         |         |           | 颜色<br>Color |
|----------------|------------------------------|--------------|---------|---------|-----------|-------------|
|                |                              | F<br>mm      | L<br>mm | H<br>mm | D φ<br>mm |             |
| DBF1.25-10     | 22-16                        | 2.3          | 20.0    | 10.0    | 4.0       | 红/Red       |
| DBF1.25-11     | 0.5-1.5                      | 3.0          | 21.0    |         |           |             |
| DBF1.25-14     | 1000PCS                      | 3.0          | 24.0    |         |           |             |
| DBF1.25-18     |                              | 2.2          | 28.0    | 10.0    | 4.5       | 蓝/Blue      |
| DBF2-10        | 16-14                        | 2.4          | 19.0    |         |           |             |
| DBF2-14        | 1.5-2.5                      | 2.4          | 24.0    |         |           |             |
| DBF2-18        | 1000PCS                      | 2.2          | 28.0    | 13.5    | 6.4       | 黄/Yellow    |
| DBF5.5-10      | 12-10                        | 2.8          | 22.5    |         |           |             |
| DBF5.5-14      | 4-6                          | 4.5          | 26.5    |         |           |             |
| DBF5.5-18      | 500PCS                       | 4.5          | 30.5    |         |           |             |

## RCCN 日成DBN片形裸端子



| 型号<br>Item No. | AWG<br>mm <sup>2</sup><br>包装 | 尺寸 DIMENSION |         |         |           |           |
|----------------|------------------------------|--------------|---------|---------|-----------|-----------|
|                |                              | B<br>mm      | L<br>mm | F<br>mm | D φ<br>mm | d φ<br>mm |
| DBN1.25-10     | 22-16                        | 2.3          | 14.8    | 10.0    | 3.4       | 1.7       |
| DBN1.25-11     | 0.5-1.5                      | 3.0          | 15.8    | 11.0    |           |           |
| DBN1.25-14     | 1000PCS                      | 3.0          | 18.8    | 14.0    |           |           |
| DBN1.25-18     |                              | 2.3          | 22.8    | 18.0    | 4.1       | 2.3       |
| DBN2-9         | 16-14/1.5-2.5<br>1000PCS     | 2.3          | 13.8    | 9.0     |           |           |
| DBN2-18        |                              | 2.3          | 22.8    | 18.0    |           |           |
| DBN5.5-10      | 12-10                        | 2.8          | 14.8    | 10.0    | 5.6       | 3.4       |
| DBN5.5-14      | 4-6                          | 4.5          | 21.0    | 14.0    |           |           |
| DBN5.5-18      | 500PCS                       | 4.5          | 23.0    | 18.0    |           |           |
| DBN8-14        |                              | 5.0          | 22.5    | 14.0    | 7.2       | 4.5       |
| DBN14-16       |                              | 6.0          | 30.6    | 16.0    | 9.0       | 6.5       |