


## RCCN 日成PNA尼龙全绝缘母端子 PNA Nylon Insulated Female Lug




| 型号<br>Item No. | AWG<br>mm <sup>2</sup><br>包装 | 尺寸 DIMENSION |         |         |         |           |         | 颜色<br>Color |
|----------------|------------------------------|--------------|---------|---------|---------|-----------|---------|-------------|
|                |                              | T×W<br>mm    | W<br>mm | F<br>mm | E<br>mm | d φ<br>mm | L<br>mm |             |
| PN1.25-250A    | 22-16<br>0.5-1.5<br>1000PCS  | 0.8×6.35     | 6.6     | 8.0     | 5.0     | 1.7       | 22      | 红<br>Red    |
| PN1.25-187A    |                              | 0.8×4.8      | 4.8     | 6.5     | 5.0     | 1.7       | 22      |             |
| PN1.25-110A    |                              | 0.8×2.8      | 2.8     | 6.5     | 5.0     | 1.7       | 19.5    |             |
| PN2-250A       | 16-14<br>1.5-2.5<br>1000PCS  | 0.8×6.35     | 6.6     | 8.0     | 5.0     | 2.3       | 22      | 蓝<br>Blue   |
| PN2-187A       |                              | 0.8×4.8      | 4.8     | 6.5     | 5.0     | 2.3       | 20      | 黄<br>Yellow |
| PN5.5-250A     | 12-10/4-6<br>500PCS          | 0.8×6.35     | 6.6     | 8.0     | 6.0     | 3.4       | 25.5    |             |


## RCCN 日成PNB尼龙全绝缘公端子 PNB Nylon Insulated Male Lug




| 型号<br>Item No. | AWG<br>mm <sup>2</sup><br>包装 | 尺寸 DIMENSION |         |         |         |           |         | 颜色<br>Color |
|----------------|------------------------------|--------------|---------|---------|---------|-----------|---------|-------------|
|                |                              | T×W<br>mm    | W<br>mm | F<br>mm | E<br>mm | d φ<br>mm | L<br>mm |             |
| PN 1.25-250B   | 22-16/0.5-1.5                | 0.8×6.35     | 6.35    | 9.0     | 5.0     | 1.7       | 24      | 红Red        |
| PN 2-250B      | 16-14/1.5-2.5                | 0.8×6.35     | 6.35    | 9.0     | 5.0     | 2.3       | 24      | 蓝Blue       |
| PN 5.5-250B    | 12-10/4-6                    | 0.8×6.35     | 6.35    | 9.0     | 6.0     | 3.4       | 26.0    | 黄Yellow     |

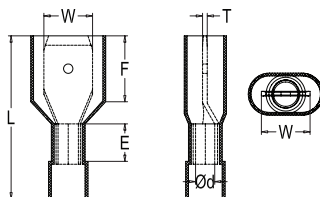


## RCCN 日成FN型尼龙旗型绝缘端子 FN Flag Female Nylon Disconnects

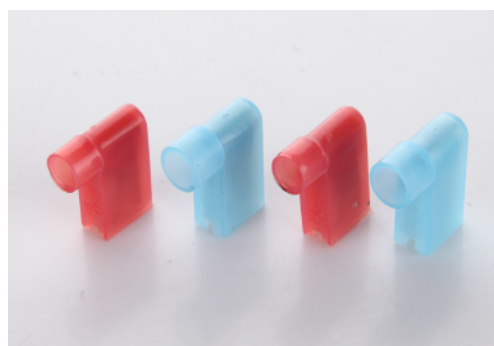

| 型号<br>Item No. | NEMA TAB<br>T×W<br>mm | 尺寸 DIMENSION |         |           |         | 绝缘套颜色<br>INSULATION<br>COLOR |
|----------------|-----------------------|--------------|---------|-----------|---------|------------------------------|
|                |                       | W<br>mm      | F<br>mm | d φ<br>mm | L<br>mm |                              |
| FN 1.25-250    | 0.8×6.35              | 6.4          | 9.0     | 1.7       | 2       | 红/Red                        |
| FN 2-250       | 0.8×6.35              | 6.4          | 9.0     | 2.3       | 24      | 蓝/Blue                       |

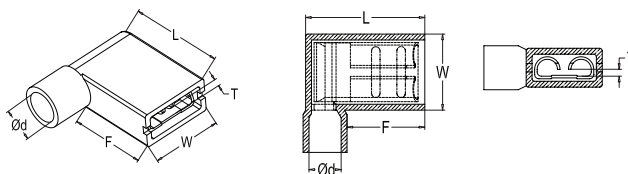

## RCCN 日成BN型尼龙中间端子 BN Butt Splice Nylon Insulated

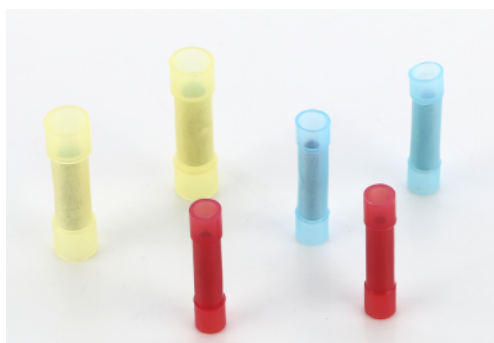

| 型号<br>Item No. | 导线截面<br>Insulated square<br>A.W.G mm <sup>2</sup> |         | 尺寸 DIMENSION |         |           | 最大<br>电流<br>Imax | 绝缘套颜色<br>INSULATION<br>COLOR |
|----------------|---------------------------------------------------|---------|--------------|---------|-----------|------------------|------------------------------|
|                |                                                   |         | d φ<br>mm    | L<br>mm | D φ<br>mm |                  |                              |
| BN-0.5         | 26-22                                             | 0.2-0.5 | 1.3          | 20.0    | 2.0       | 9A               | 黄/Yellow                     |
| BN-1.25        | 22-16                                             | 0.5-1.5 | 1.7          | 27.3    | 3.2       | 19A              | 红/Red                        |
| BN-2.0         | 16-14                                             | 1.5-2.5 | 2.3          | 27.3    | 3.8       | 27A              | 蓝/Blue                       |
| BN-5.5         | 12-10                                             | 4-6     | 3.4          | 27.3    | 5.3       | 48A              | 黄/Yellow                     |

