


## RCCN 日成MCR型金属软管 Metal Flexible Conduit

推荐  
Recommended

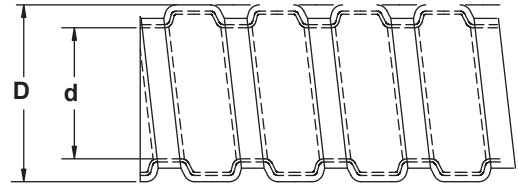

产品材质:(内层):热浸镀锌钢板及特殊绝缘处理。  
(外层):PVC(黑色抗紫外线,防老化)

产品认证:欧洲CE,欧洲环保RoHS

防火等级:UL94V-0,低烟无毒

颜色种类:黑色或灰色

工作温度:-30 到+85 ,瞬间可耐热达100

产品特性:1软管有极佳之防水,绝缘性,抗拉性

2表面加PVC被覆,且PVC塑料其中添加了防火阻燃剂,并加抗UV紫外线和防止老化作用之成份。

3结构为反扣型增加抗拉强度,不容易折断或变形。

4具超柔软与极佳弯曲性能,内部平滑构造在穿引电线时极容易。

应用领域:铁路,机车,交通系统工程,空调,各种机械,自动控制设备,发电厂。

化工,输配电系统,通讯系统,基地台架设,船舶,大厦,厂房内及屋外露出部分之配线保护。

使用方法:先将电线穿入管内,再配合金属软管固定头即可。

用途:保护电线电缆以及达到绝缘,防水,并可增进线缆弯曲美观。

Material:(inner):zinc coated steel, special insulated processed.  
(outer):UL approved PVC

Certificates:CE

Fireproof class:UL94V-2, low smoking, poison free

Color:black, gray

Work T.: -10 to +85 ,100 in a short time

Products Characteristics:1.good waterproof,insulated,retension

2.PVC wrapped , PVC is UV and inflammation resistant

3.uneasy to break and construction changing, for its special design

4.smooth inside, make the wire and cable install easily

Use domain:railway,communicate project,air-conditioning,machines,roboticized equipments,power plant ships and so on

Use way:insert the cables into the conduit, then fix the correct connectors.

单位/Unit:mm

型号 Item No.		规格 Trade Sizes		内径 I.D. d	外径 O.D. D	弯曲半径 Bending Radius mm±10%	配套金属头 Suitable metal connector NBG	包装 Packing M
黑色Black	灰色Gray	公制 Metric ø	英制 British					
MCR-01B	MCR-01G	ø 6	3/16"	6.0±0.3	9.2±0.5	40	NBG-01	100M
MCR-02B	MCR-02G	ø 8	5/16"	8.0±0.3	11.8±0.5	45	NBG-02	100M
MCR-03B	MCR-03G	ø 10	1/4"	10.0±0.3	14.0±0.5	55	NBG-03	100M
MCR-04B	MCR-04G	ø 13	3/8"	12.0±0.3	16.3±0.5	65	NBG-04	100M
MCR-05B	MCR-05G	ø 16	1/2"	15.0±0.3	20.2±0.5	85	NBG-05	100M
MCR-06B	MCR-06G	ø 20	3/4"	19.5±0.3	24.5±0.5	100	NBG-06	50M
MCR-08B	MCR-08G	ø 25	1"	25.0±0.3	30.5±0.5	120	NBG-08	50M
MCR-10B	MCR-10G	ø 32	1 1/4"	31.5±0.3	38.0±0.5	150	NBG-10	25M
MCR-12B	MCR-12G	ø 38	1 1/2"	38.0±1.0	44.6±1.0	180	NBG-12	25M
MCR-16B	MCR-16G	ø 51	2"	50.0±1.0	58.0±1.0	220	NBG-16	10M
MCR-20B	MCR-20G	ø 64	2 1/2"	62.0±1.5	74.5±1.5	310	NBG-20	10M
MCR-24B	MCR-24G	ø 75	3"	73.0±2.0	85.5±2.0	350	NBG-24	10M
MCR-32B	MCR-32G	ø100	4"	100.0±3.0	110.5±3.0	410	NBG-32	10M
MCR-36B	MCR-36G	ø125	5"	125.0±3.0	135.5±3.0	460	NBG-36	5M
MCR-38B	MCR-38G	ø150	6"	150.0±4.0	160.5±4.0	500	NBG-38	5M



MCR型金属软管  
Metal Flexible Conduit



MC型金属软管  
Metal Flexible Conduit



头部为合金材质

金属软管剪刀 型号/Item No. : MCT-1