




日成六角隔离柱 HTS

材 质：六角隔离柱.合格之NYLON66(黑色或白色)
防火等级94V-2不易老化，绝缘度高。
用 法：先将机板及被固定板钻孔，再将本产品塞入压紧
即可使两板相线合。

产品规格

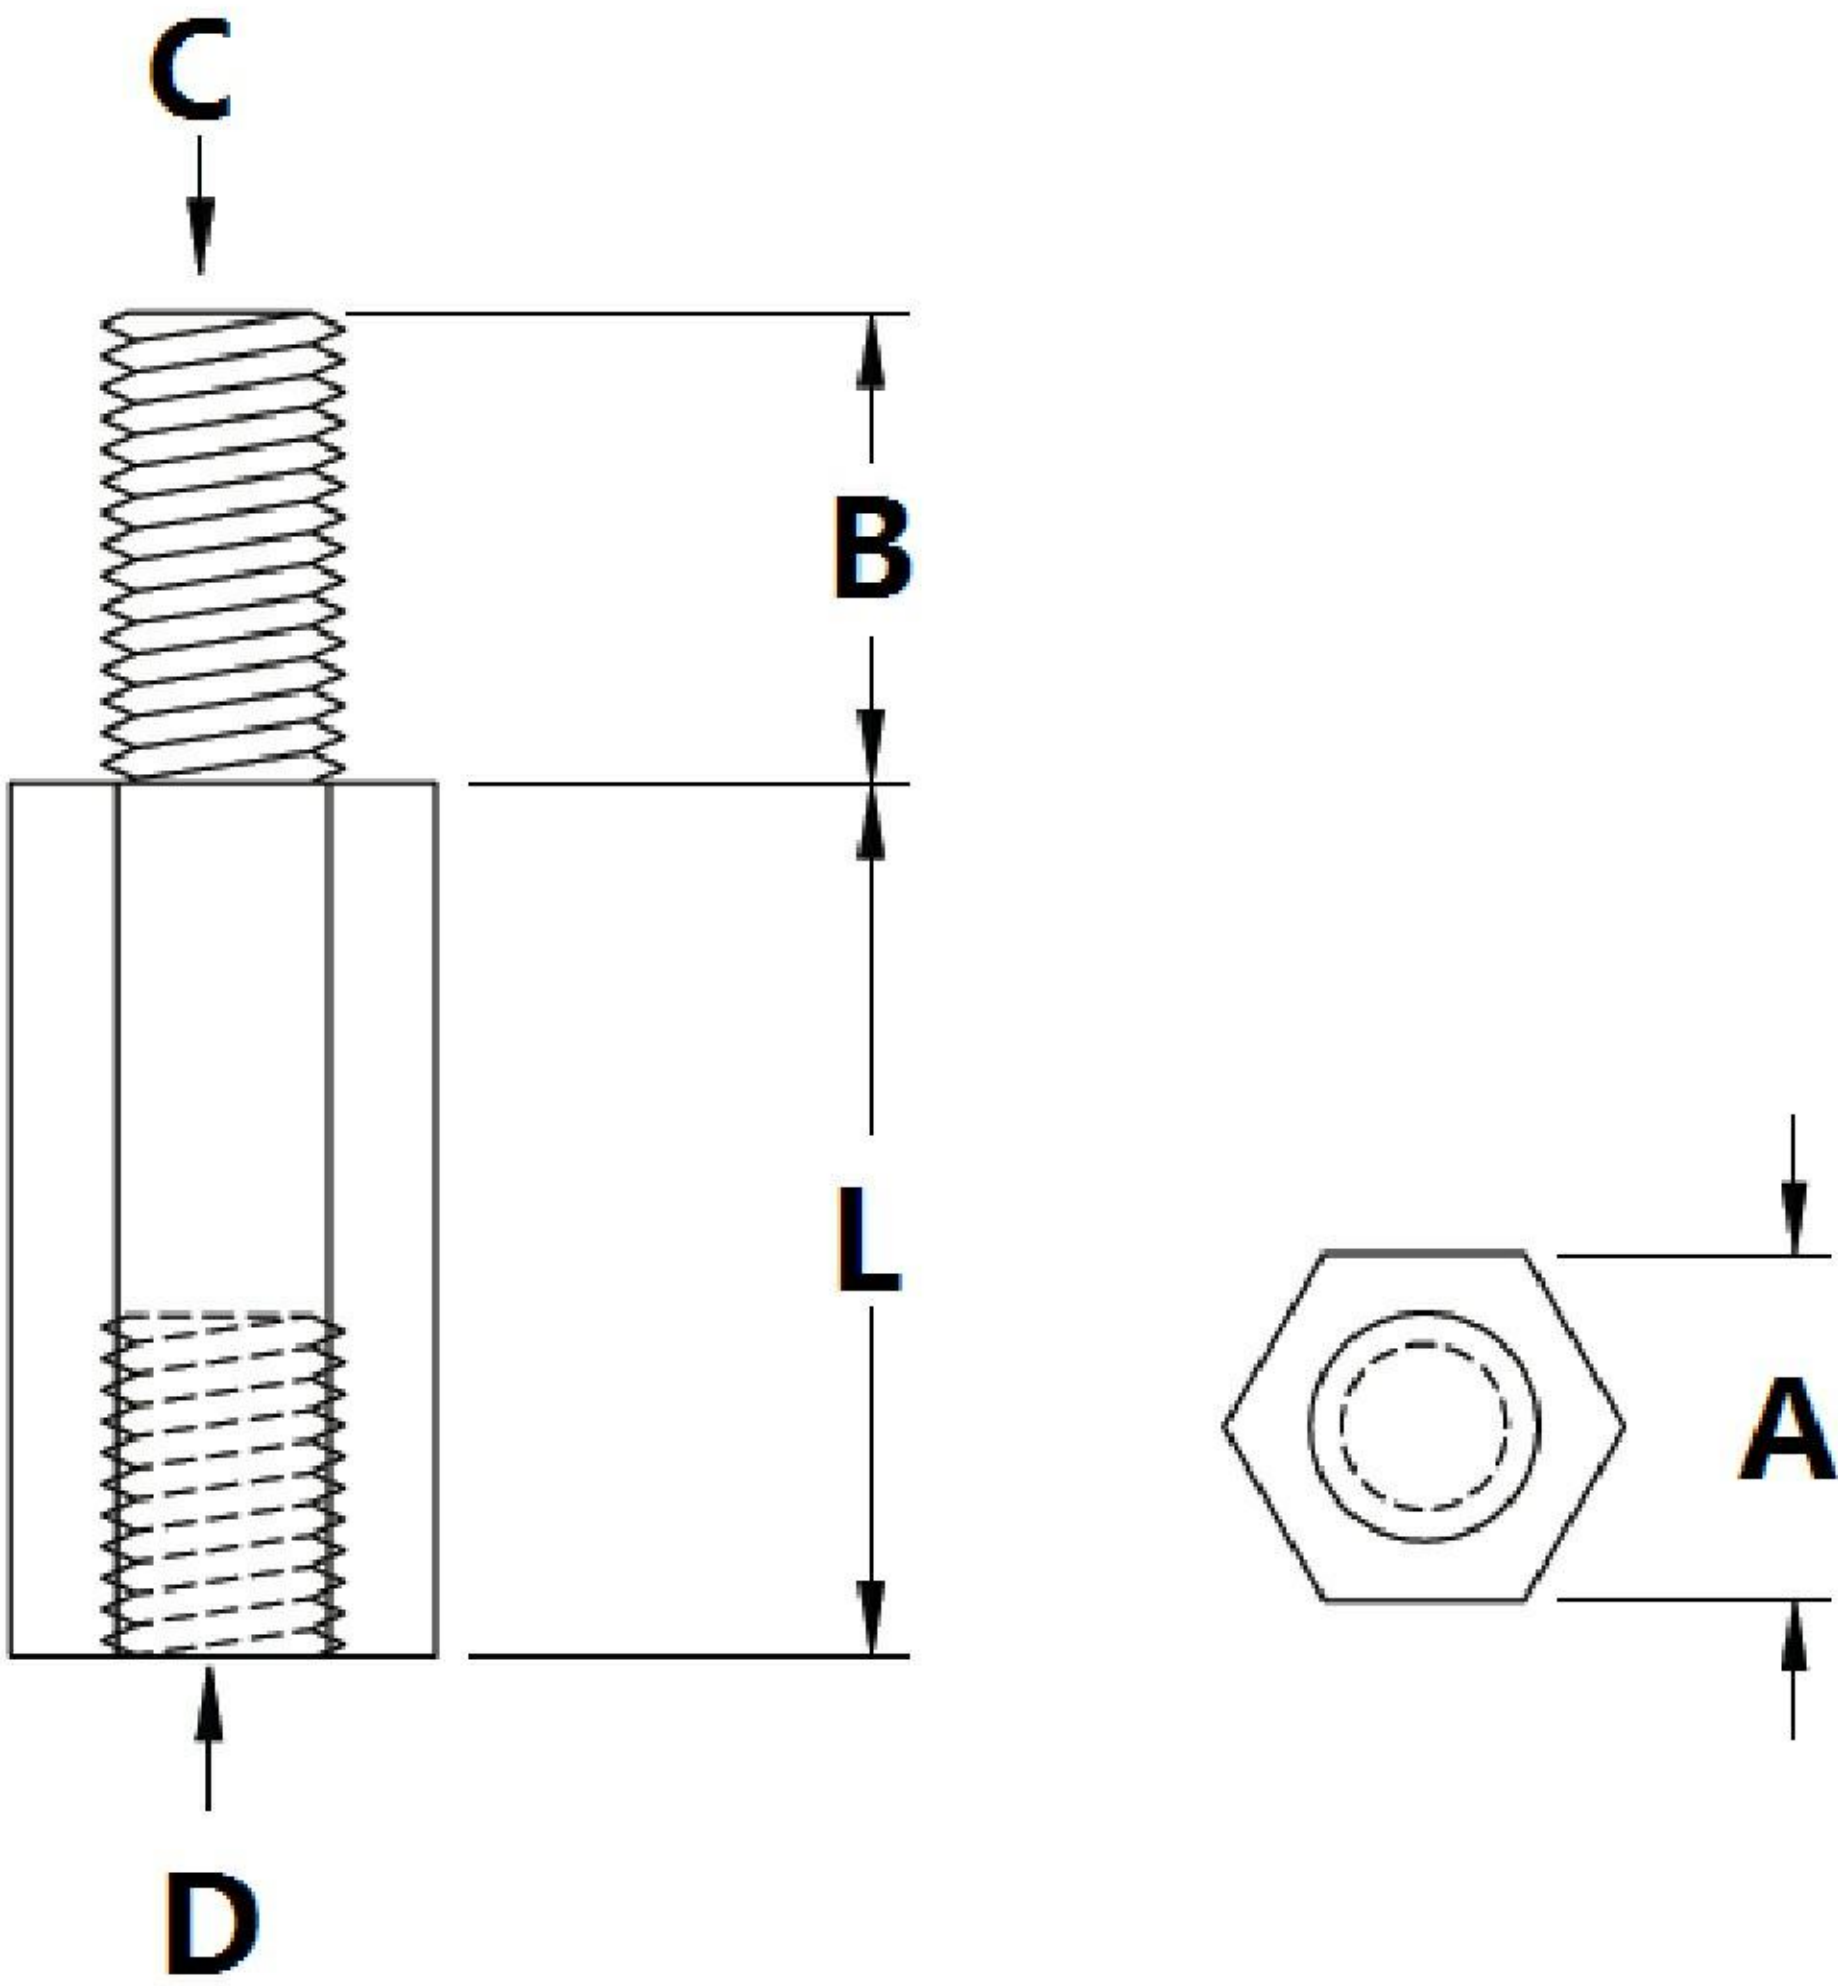

型 号 Item No.	A mm	B mm	C/D	L mm	包 装 Packing
HTS-306	5.6	6	3 适用螺帽 PN-3	6	100pcs (1000pcs)
HTS-308	5.6	6		8	
HTS-310	5.6	6		10	
HTS-312	5.6	6		12.7	
HTS-315	5.6	6		15	
HTS-318	5.6	6		18	
HTS-320	5.6	6		20	
HTS-322	5.6	6		22	
HTS-325	5.6	6		25	
HTS-330	5.6	6		30	
HTS-410	7	6	4 适用螺帽 PN-4	10.1	
HTS-413	7	6		13.0	
HTS-415	7	6		15.0	
HTS-419	7	6		19.0	
HTS-425	7	6		25.0	
HTS-430	7	6		30.0	