


## RCCN 日成Y型裸端子 Y Non-Insul Ated Spade Terminals



说明：本系列配套工具 YTT-8  
Note: installed by crimp tool YTT-8

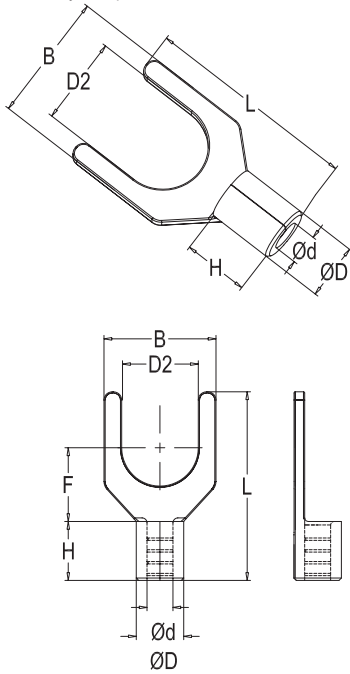

| 型号<br>Item No. | 尺寸 DIMENSION            |                       |      |      |      |      |      |     |
|----------------|-------------------------|-----------------------|------|------|------|------|------|-----|
|                | AWG<br>mm <sup>2</sup>  | 螺栓口直径<br>Dia. of bolt | B    | L    | F    | H    | D φ  | d φ |
|                | 最大电流                    | D2                    | mm   | mm   | mm   | mm   | mm   | mm  |
| Y1.25-3        | 22-16<br>0.5-1.5<br>19A | 3.2mm                 | 5.7  | 16.0 | 6.5  | 4.8  | 3.4  | 1.7 |
| YS1.25-3.5     |                         | 3.7mm                 | 5.7  | 16.0 | 6.5  |      |      |     |
| YL1.25-3.5     |                         | 3.7mm                 | 6.4  | 16.0 | 6.5  |      |      |     |
| YS1.25-4       |                         | 4.3mm                 | 6.4  | 16.0 | 6.5  |      |      |     |
| YM1.25-4       |                         | 4.3mm                 | 7.2  | 16.0 | 6.5  |      |      |     |
| YL1.25-4       |                         | 4.3mm                 | 8.1  | 16.0 | 6.5  |      |      |     |
| YS1.25-5       |                         | 5.3mm                 | 8.1  | 16.0 | 6.5  |      |      |     |
| YL1.25-5       |                         | 5.3mm                 | 9.5  | 16.0 | 6.5  |      |      |     |
| YS1.25-6       | 16-14<br>1.5-2.5<br>27A | 6.4mm                 | 9.5  | 16.0 | 6.5  | 4.8  | 4.1  | 2.3 |
| YL1.25-6       |                         | 6.4mm                 | 12.0 | 22.0 | 11.0 |      |      |     |
| Y2-3           |                         | 3.2mm                 | 5.7  | 16.0 | 6.5  |      |      |     |
| YS2-3.5        |                         | 3.7mm                 | 5.7  | 16.0 | 6.5  |      |      |     |
| YL2-3.5        |                         | 3.7mm                 | 6.0  | 16.0 | 6.5  |      |      |     |
| YS2-4          |                         | 4.3mm                 | 6.4  | 16.0 | 6.5  |      |      |     |
| YM2-4          |                         | 4.3mm                 | 7.2  | 16.0 | 6.5  |      |      |     |
| YL2-4          |                         | 4.3mm                 | 8.1  | 16.0 | 6.5  |      |      |     |
| YS2-5          | 14-12<br>2.5-4<br>37A   | 5.3mm                 | 8.1  | 16.0 | 6.5  | 6.0  | 5.0  | 3.0 |
| YL2-5          |                         | 5.3mm                 | 9.3  | 16.0 | 6.5  |      |      |     |
| YS2-6          |                         | 6.4mm                 | 9.3  | 16.0 | 6.5  |      |      |     |
| YL2-6          |                         | 6.4mm                 | 12.0 | 22.0 | 11.0 |      |      |     |
| Y3.5-3         |                         | 3.2mm                 | 5.7  | 18.3 | 7.0  |      |      |     |
| Y3.5-4         |                         | 4.3mm                 | 8.0  | 18.3 | 7.0  |      |      |     |
| Y3.5-5         |                         | 5.3mm                 | 8.0  | 18.3 | 7.0  |      |      |     |
| Y3.5-6         |                         | 6.5mm                 | 12.0 | 21.5 | 7.0  |      |      |     |
| YS5.5-3.5      | 12-10<br>4-6<br>48A     | 3.7mm                 | 7.2  | 17.4 | 7.5  | 6.8  | 5.6  | 3.4 |
| Y5.5-3.5       |                         | 3.7mm                 | 8.3  | 18.5 | 7.0  |      |      |     |
| YS5.5-4        |                         | 4.3mm                 | 8.3  | 18.5 | 7.0  |      |      |     |
| YL5.5-4        |                         | 4.3mm                 | 9.0  | 18.5 | 7.0  |      |      |     |
| Y5.5-5         |                         | 5.3mm                 | 9.0  | 18.5 | 7.0  |      |      |     |
| YS5.5-6        |                         | 6.4mm                 | 9.0  | 18.5 | 7.0  |      |      |     |
| YL5.5-6        |                         | 6.4mm                 | 12.0 | 24.5 | 12.0 |      |      |     |
| Y5.5-8         |                         | 8.4mm                 | 14.0 | 23.5 | 10.5 |      |      |     |
| Y8-4           | 6-10<br>62A             | 4.3mm                 | 9.0  | 20.8 | 8.1  | 8.5  | 7.2  | 4.5 |
| Y8-5           |                         | 5.3mm                 | 9.0  | 20.8 | 8.1  |      |      |     |
| Y8-6           |                         | 6.5mm                 | 12.0 | 23.8 | 9.2  |      |      |     |
| Y8-8           |                         | 8.4mm                 | 13.8 | 25.4 | 10.7 |      |      |     |
| Y8-10          |                         | 10.5mm                | 15.9 | 25.4 | 10.7 |      |      |     |
| Y14-4          | 10-16<br>88A            | 4.3mm                 | 11.0 | 25.5 | 10.7 | 10.5 | 9.0  | 5.8 |
| Y14-5          |                         | 5.3mm                 | 11.0 | 25.5 | 10.7 |      |      |     |
| Y14-6          |                         | 6.5mm                 | 11.0 | 25.5 | 10.7 |      |      |     |
| Y14-8          |                         | 8.4mm                 | 13.8 | 28.5 | 10.7 |      |      |     |
| Y14-10         |                         | 10.5mm                | 15.9 | 28.5 | 10.7 |      |      |     |
| Y22-5          | 16-25<br>115A           | 5.3mm                 | 11.0 | 27.7 | 9.5  | 12.0 | 11.5 | 7.7 |
| Y22-6          |                         | 6.5mm                 | 11.0 | 27.7 | 9.5  |      |      |     |
| Y22-8          |                         | 8.4mm                 | 16.5 | 33.5 | 13.5 |      |      |     |
| Y22-10         |                         | 10.5mm                | 16.5 | 33.5 | 13.5 |      |      |     |
| Y38-6          | 35-50<br>160A           | 6.5mm                 | 15.9 | 35.0 | 13.5 | 14.0 | 13.3 | 9.4 |
| Y38-8          |                         | 8.4mm                 | 15.9 | 35.0 | 13.5 |      |      |     |
| Y38-10         |                         | 10.5mm                | 15.9 | 35.0 | 13.5 |      |      |     |
| Y38-12         |                         | 13.0mm                | 19.0 | 38.0 | 15.5 |      |      |     |